FOR-1351 Rev.1.0

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



DS16-PE - 01P - 1Y - 00A (H)

- DS16-PE: (Series No.)
- 01P: (Poles)
- 1Y: (Single Pitch)
- 00A: (Standard)
- (H): (RoHS)
- (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

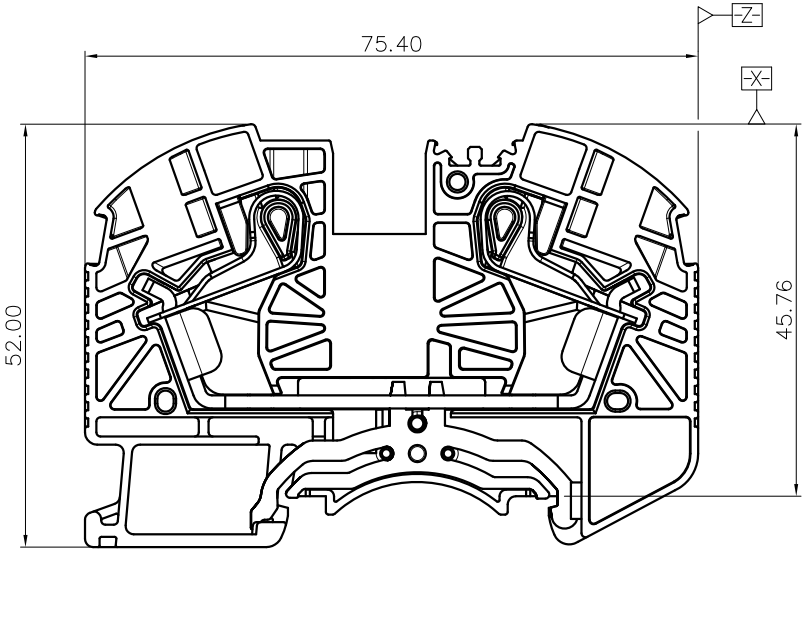

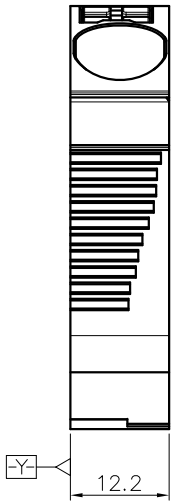

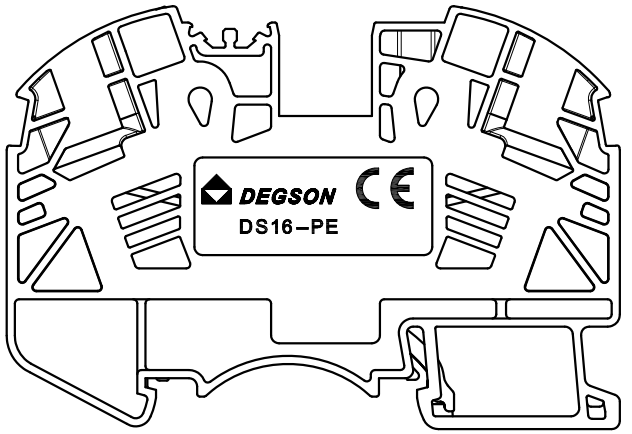

NOTES1:
UL Standard
1.Wire range : 20~4AWG

IEC Standard
1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	/
Rate current(A)	/

2.Wire range : 0.5~16mm²,25mm²(SOL)

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 12.2mm, Poles : 01P
3.Stripping length : 18mm
4.Operating temperature: -40°C~+105°C
5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm						
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150		0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30		±2°

6.RoHS Compliance

DETACHED LISTS

PART NO.: /	DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
APPD:	NAME: DS16-PE-01P-1Y-00A(H)		
CHKD:			
DRFT: /	TITLE: CUSTOMER DRAWING	REV	D0
THIRD ANGLE PROJECTION	DRAWING NO.: /	SHEET	1/1
	MM (INCH) DO NOT SCALE DRAWING	SCALE	1:1