
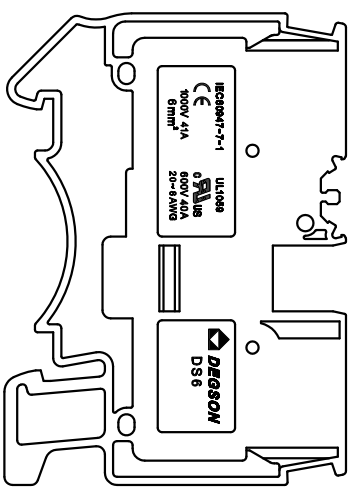


REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

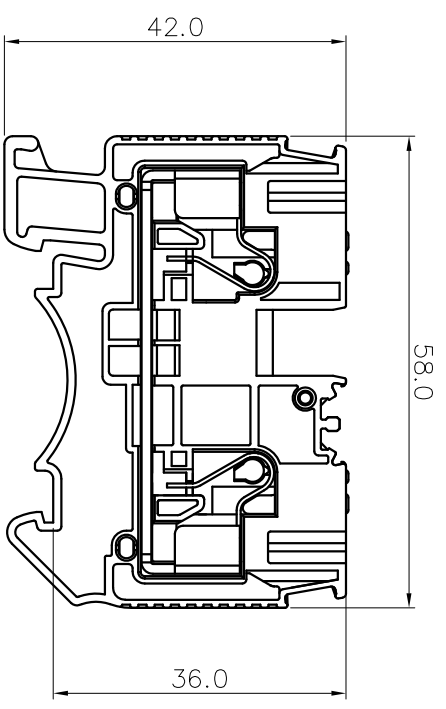

DS6 - 01P - 1Y - 00A (H)
 (Series No.)(Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

NOTES1:

- UL Standard
- 1.Rated voltage/current : 600V / 40A
- 2.Withstanding voltage : AC2200V/1Min.
- 3.Wire range : 20~8AWG

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 8.2mm, Poles : N=01P
- 3.Stripping length : 10~12mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	1000V
Rate current(A)	41A

2.Wire range : 0.5~6mm²&10mm²(sol)

Pitch Range	In mm	Nominal Dimension	Range	Over	Under
6	10	30	60	100	150
10	24	30	60	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
				±1.00	±1.30
					±2°

6.RoHS Compliance

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME:	宁波高松电子有限公司
CHKD:	/	TITLE:	CUSTOMER DRAWING
DFT:	/	DRAWING NO.:	/
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
		SCALE	1:1