

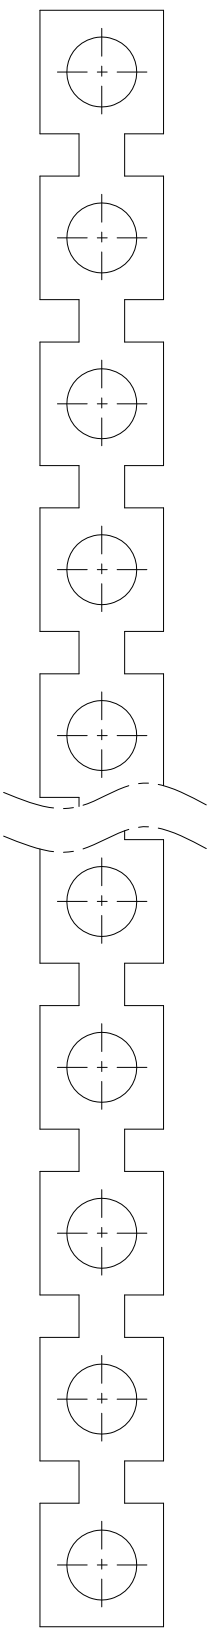
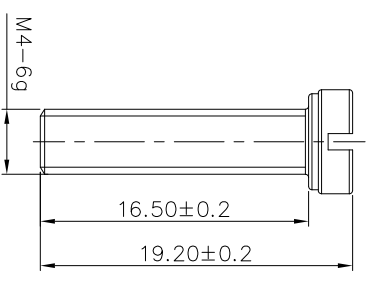


REVISION RECORD			
REV	ECN	DESCRIPTION	DATE



$$10.20 \times (N-1) + 7.6$$

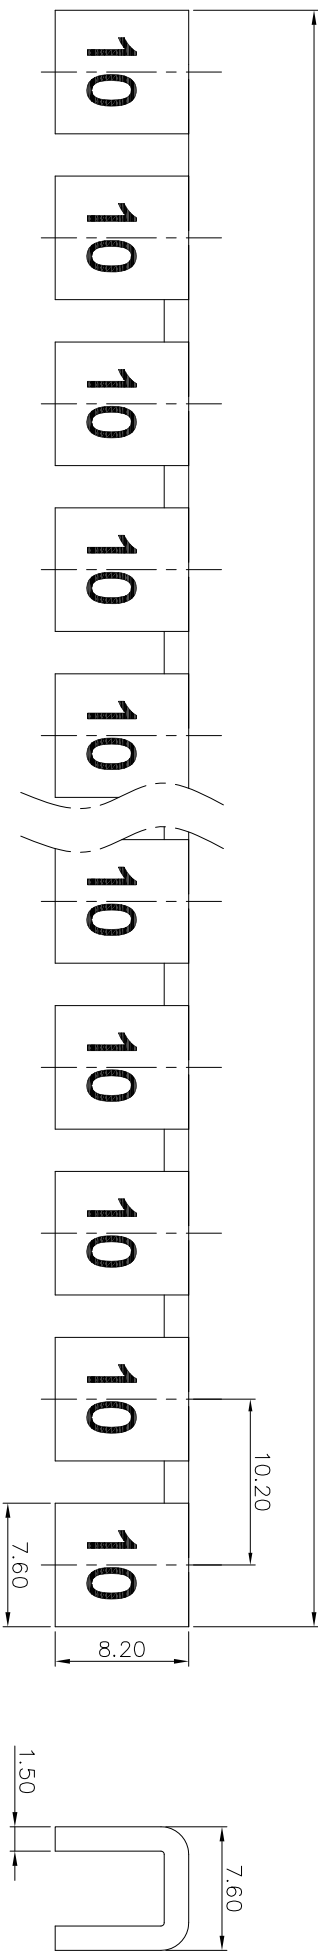

NOTES1:
 UL Standard
 1. Torque value : M4 , 10.53Lb.in
 IEC Standard
 1. Torque value : M4 , 1.2N.m

NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 10.2mm; Poles : 02~10P
 3. Undimensioned tolerances:

Pitch	range	in	Nominal	dimension	range		
mm			in	mm		-	∠
Over	TO	6	Over	30	Over	0.1	∠10
TO	TO	10	TO	50	TO		
6	TO	24	60	100	150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

4. RoHS Compliance

FBI XX - 10
 (Series No.) (Poles) (Pitch)

Current carrier and screws should be packed individually, which must be put in the same box

DETACHED LISTS			
PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	宁波高松电子有限公司
APPD:	/	NAME:	FBIXX-10
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
		SCALE	1:1