

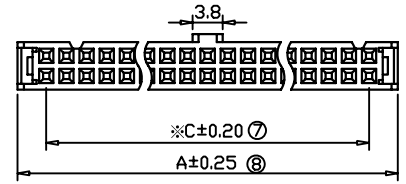

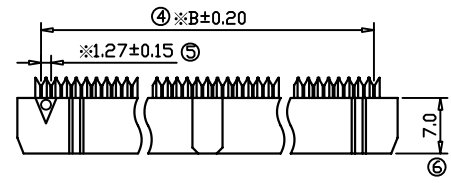

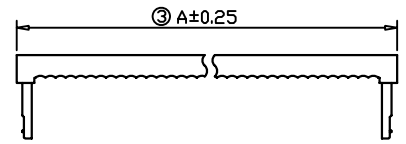



PROPERTY IN COPYRIGHT

REV	ECN NO.	DATE	DESIGN
A	N/A	2010/08/15	GRP

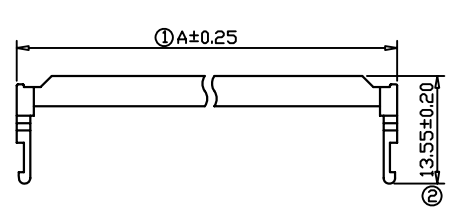

6P~8P



SINGLE CONTACT TYPE

Material:
 Insulator: PBT+Glass Fiber (UL94V-0).
 Contact: Copper Alloy.
 Contact Plated: Gold or Tin over Nickel Plated.
 Grounding Bar: Copper Alloy with Nickel Plated.
 Specification:
 Current Rating: 1 Amp.
 Withstanding Voltage: AC 500V for 1 Minute.
 Insulation Resistance: 100M Ohm Max. at DC 500V.
 Contact Resistance: 1 Ohm Max..
 Operating Temperature: -40°C ~ +105°C.
 (標※處為重點檢驗尺寸)

Pos.	Dim. A	Dim. B	Dim. C
6	12.32	6.35	5.08
8	14.86	8.89	7.62
10	17.40	11.43	10.16
12	19.94	13.97	12.70
14	22.48	16.51	15.24
16	25.02	19.05	17.78
18	27.56	21.59	20.32
20	30.10	24.13	22.86
24	35.18	29.21	27.94
26	37.72	31.75	30.48
28	40.26	34.29	33.02
30	42.80	36.83	35.56
34	47.88	41.91	40.64
36	50.42	44.45	43.18
40	55.50	49.53	48.26
44	60.58	54.61	53.34
50	68.20	62.23	60.96
60	80.90	74.93	73.66
64	85.98	80.01	78.74

8P~64P

	SIGNATURE	DATE	TITLE:
5 DRN.	GRP	2010/08/15	2.54mm IDC Connector Single Contact/with Nose Type
CHK.			Q&T. P/N:
APP.			CUS. P/N:

CODE. NO.	-----
CUS. NO.	-----
SCALE	-----
UNIT	mm
PAGE	1/1

TOLERANCE:	
X.	±0.3
.X	±0.2
.XX	±0.1
.XXX	±0.05
ANG.	

深圳市深琪博电子有限公司

DRAWING NO.	
NO	
FC/成品圖	