

### SPECIFICATIONS




Current Rating: 5A AC/DC  
 Voltage Rating: 250V AC/DC  
 Contact Resistance: 20m Ω Max  
 Insulation Resistance: 1000M Ω Min  
 Withstanding Voltage: 1500V AC for 1 minute  
 Temperature Range: -25°C to +85°C  
 Material: NY66, UL94V-2


### ORDER INFORMATION

H 3960 - XX



No. of Pin	Dimensions	
	A	B
2	3.96	8.68
3	7.92	12.64
4	11.88	16.60
5	15.84	20.56
6	19.80	24.52
7	23.76	28.48
8	27.72	32.44
9	31.68	36.40
10	35.64	40.36
11	39.60	44.32
12	43.56	48.28
13	47.52	52.24
14	51.48	56.20
15	55.44	60.16
16	59.40	64.12

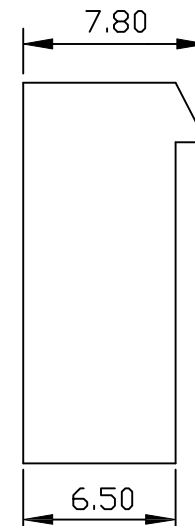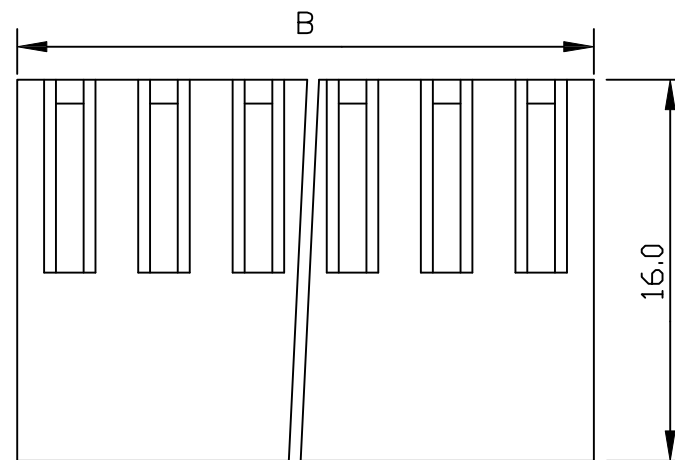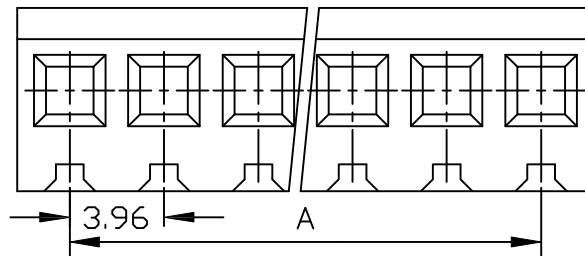

 Morecrafts Technology TEL: +886-2-2966-1326 FAX: +886-2-2966-1352 www.morecrafts.com.tw	PART NO.	H3960-XX	DRAWN	Andrew				
	DRAWING NO.	H3960-XX	CHECKED	Claudia				
	DATE	2018/02/02	APPROVED	Brian				
TITLE:	3.96mm Pitch Housing	REV. A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm