
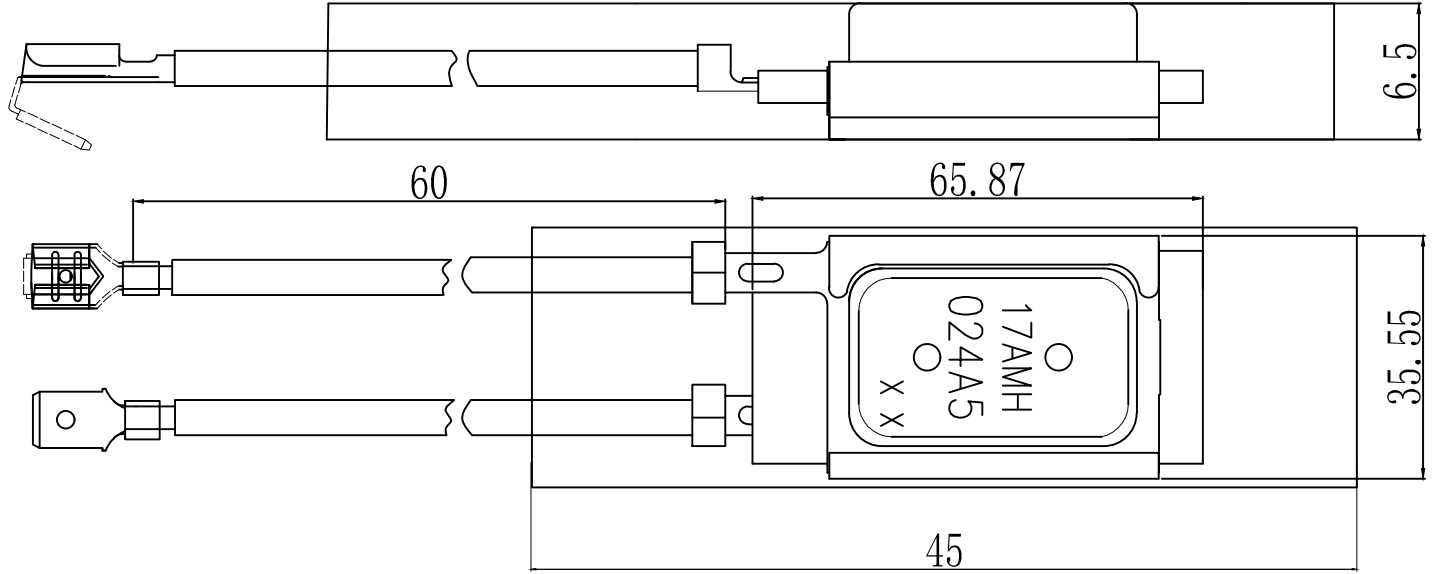


接收单位: 客户 仓库 生产部 工程部 品质部 采购部

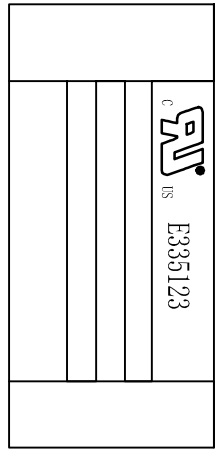

Technical specification

- The part's surface not allow have crack and obvious loss.
- The lead wire use AWG18 1015 black wire 60mm*2,L1 with male and female integrated terminal, L2 with male terminal.
- Contact 250V 10A; Contact type: Normally closed
- Open temperature:85°C±5°C
Reset temperature: with PTC, power off reset
- Insulation resistance ≤50mΩ
- Insulation resistance ≥100MΩ
- and insulation shell or casing applied 50HZ 1500VAC lasted 5 seconds test no breakdown,no flashover.(leakage 1 mA)
- Lead wire under 60N/1min(or 100N/1-3S)pull force test,no breakdown, no loose,lead wire no slip out.

| | | | |
|---|--|---|---|
|  | Dongguan Heng Hao Electric Co., Ltd 东莞市恒浩电器有限公司 |  |  |
|---|--|---|---|

| | | | | | | | | | | | | | | |
|---|---|---|-----|----|-----|------|---------|------------|--------------------|----|--|-----------------------|----|-------|
| | | | | | | 图纸编号 | 17AM A1 | 名称 | 恒温器 | | | 公差 | | |
| | | | | | | 产品编号 | | 客户编号 | HH-17AM-240223-01S | | | .xx±0.05 .x±0.1 .±1角度 | | |
| | | | | | | 作成 | 李樱花 | 审核 | | 承认 | | 比例 | 单位 | 版次 |
| 序 | 日 | 期 | 修改前 | 处数 | 修改者 | 核准 | 日期 | 2024-02-23 | 日期 | 日期 | | N / A | mm | A / 0 |

1

2

3

4

5

6