





ROHS Compliant

NOTES:
 Voltage Rating:125V,AC/DC
 Current Rating:3.0 AMP,AC/DC
 Dielectric Withstand Voltage:500V,AC/Minute
 Contact Voltage:20 mΩ Max
 Insulation Voltage:1000 mΩ Min
 Operation Temperature:-25°C to +85°C
 Insulator Material:Polyester,UL94 V-0
 Contact Material:Brass
 Contact Plating:Au or Sn over NI Plated

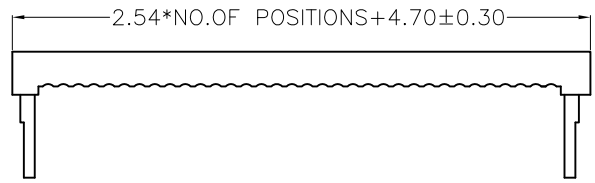


NEW PART NUMBER
 IDC C 70-A XX DB XX X X 01


NO.of Pins: 04-64P
 Contact Plating: G0=Gold Flash, S0=Gold Flash/Tin
 Insulator Color: B=Black, G=Grey
 Option Type: N=Without Bump, W=With Bump

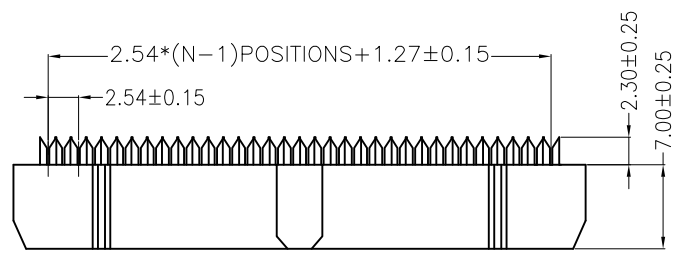

W/T Bump
 IDCC70-AXXDBXXXW01



W/O Bump
 IDCC70-1XXDBXXXN01

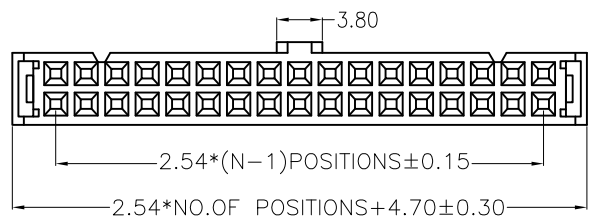

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE
A0	2014/07/01	NEW		X.X ±0.40	Helen	2014/07/01
				X.XX ±0.25	Jenny	2014/07/01
				X.XXX ±0.15	Franck	2014/07/01
				Angle ±3°	Steven	2014/07/01
				DIM TOL		

LPI 深圳市起德电子科技有限公司
 SHEN ZHEN QIDE ELECTRONIC TECHNOLOY CO.,LTD

PART NO.	IDCC70-AXXDBXXX01	UNIT	mm
TITLE	2.54mm IDC,H=7.00,D Type Without strain relief clamp	SCALE	1:1
Customer NO.	---	SHEET	1/1
		PROJ.	☉