


Product parameter

Product parameters are subject to change without notice. Please refer to the latest version of the product manual for details.

type	No.	JBK-100VA	Work efficiency	> 98%
let		100VA	Operating frequency	50/60HZ
Insulation resistance		>50MOH	Working environment	Temperature -5 to +40 °C Humidity ≤95%
Input voltage		380V, 220V can be customized according to requirements.	Output voltage	220/127/110/36/24/12/6V

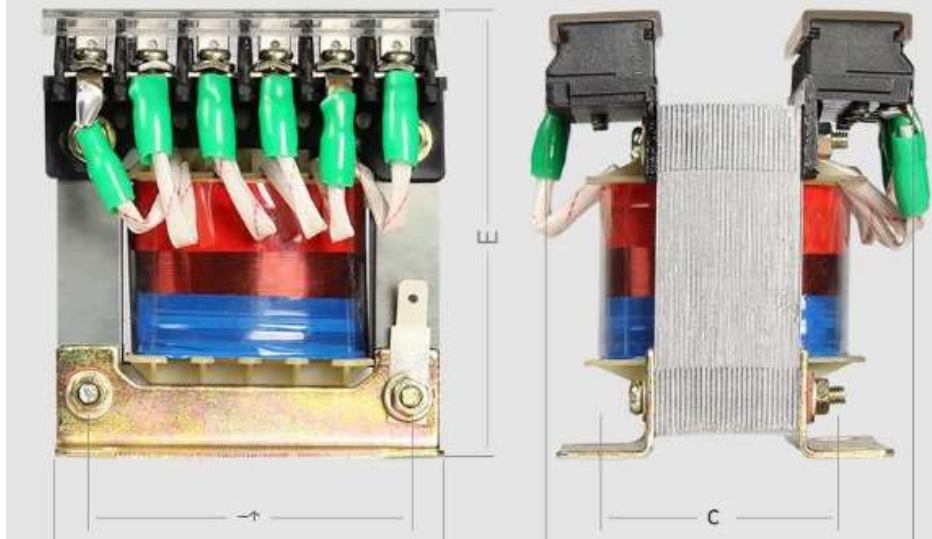

Type specification	Mounting dimension		Overall dimension		
	A	B	C	D	E
JBK1、 2、 3、 4-40	56±0.5	51±2	78	70	86
2个, 3个, 4-63个	56±0.5	51±2	78	70	86
jbk1, 2,3,4 -100	64±0.5	67±2	85	85	93
jbk1, 2,3,4 -160	84±0.5	72±2	96	90	103
当1,2,3,4 -250	84±0.5	86±2	96	105	103
JBK1、 2、 3、 4-400	90±0.5	90±2	120	113	123
JBK1、 2、 3、 4-630	122±0.5	86±2	150	118	145
jbk1, 2,3,4 -800	122±0.5	100±2	150	128	145
jbk1, 2,3,4 -1000	127.5±2	152±2	155	205	145
jbk1, 2,3,4 -1600	140±2	176±2	180	230	160
当1 2 3 4 2500	173±2	200±2	205	260	175