



STRAIGHT TYPE

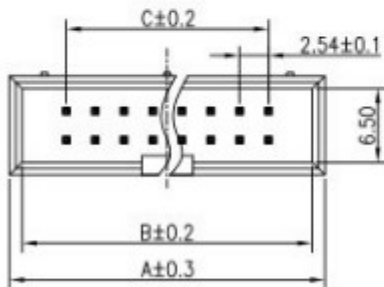

RIGHT ANGLE TYPE

Dimension

Position	A	B	C
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.86
26	40.62	38.42	30.48
30	45.70	43.50	35.56
34	50.78	48.58	40.64
40	58.40	56.20	48.26
50	71.10	68.90	60.96
60	83.80	81.60	73.66
64	88.88	86.68	78.74

1. 材质

- 1.1 胶芯:UL94L-0
- 1.2 端子:铜合金

2. 电气特性:

- 2.1 接触阻抗:初始最大20mΩ.
- 2.2 耐电压:500V/1分钟.
- 2.3 绝缘阻抗:最小1000MΩ.

3. 环境特性

- 3.1 操作温度:-40°C - +105°C
- 3.2 贮存温度:-20°C - +70°C

4. 产品编码

KF1009-X X X X

