


Note:

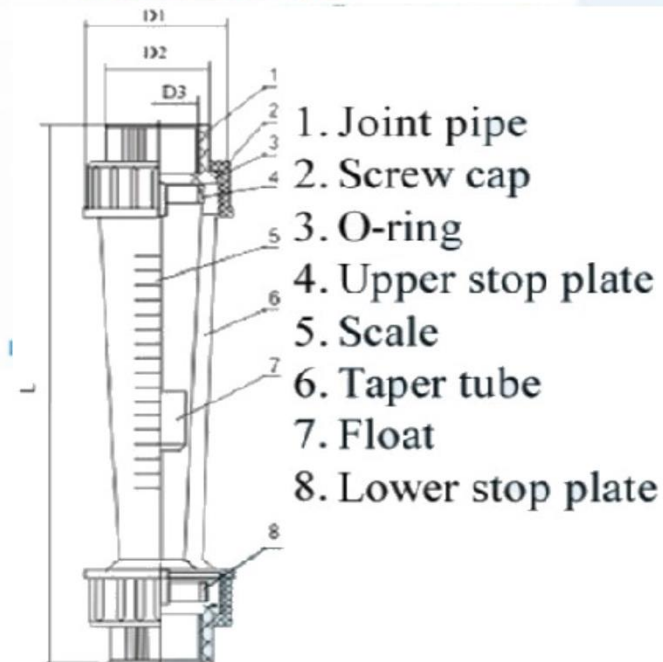
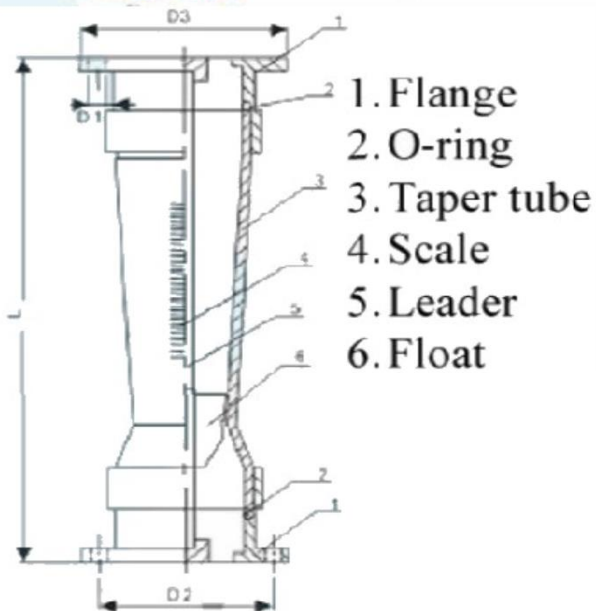
- Short Tube (with leader)
- Long Tube (without leader)


Glue
Female Threaded
Flange
■ Specification

Model	LZS-15 (L/h)	LZS-20 (L/h)	LZS-25 (L/h)	LZS-32 (m ³ /h)	LZS-40 (m ³ /h)	LZS-50 (m ³ /h)	LZS-65 (m ³ /h)	LZS-80 (m ³ /h)	LZS-100 (m ³ /h)	LZS-125 (m ³ /h)	LZS-150 (m ³ /h)
Measure Range	6-60										
	10-100										
	16-160			60-600							
	25-250	40-400	100-1000	0.4-4	0.4-4	0.4-4	1-10	5-25	8-50	18-120	18-120
	40-400	60-600	160-1600	0.6-6	0.6-6	0.6-6	5-25	8-40	12-60	15-150	15-150
	60-600	100-1000	250-2500	1-10	1-10	1-10	8-40	12-60	14-90	22-180	22-180
	80-800		300-3000		1.2-12	1.6-16	12-60	12-80	18-120	25-200	25-200
100-1000											
Type	Long Tube Short Tube						Short Tube		Short Tube Flange Connection		
Accuracy	±4%										
Temperature	0-60°C										
Pressure	≤0.6 MPa										

Material

1. The materials of part of the flow meter: taper tube is AS, leader is SS304, other are all ABS
2. The flow meter under DN 65 could be made into flange connection type of screw thread connection type
3. The materials of flow, joint pipe and leader could be customized

Glue & Screw Type

Flange Type


Model	Pipe DN (mm)	Intubation Connection Size								The Flange			
		Long Tube				Short Tube				Short Tube			
		L	D1	D2	D3	L	D1	D2	D3	L	D1	D2	D3
LZS-15	15	280	45	26	20	202	45	26	20				
LZS-20	20	322	51	31	25	230	51	31	25				
LZS-25	25	380	68	39	32	226	60	39	32	300	Φ12 x 4	85	100
LZS-32	32	390	74	49	40	288	74	49	40	365	Φ14 x 4	100	120
LZS-40	40	420	88	63	50	430	87	63	50	470	Φ14 x 4	110	130
LZS-50	50	430	98	73	63	341	98	73	63	445	Φ14 x 4	125	140
LZS-65	65					430	123	88	75	530	Φ17 x 4	145	162
LZS-80	80					505	142	106	90	540	Φ17 x 8	160	189
LZS-100	100									555	Φ17 x 8	180	189
LZS-125	125									555	Φ17 x 8	210	189
LZS-150	150									555	Φ17 x 8	240	189