


MDO9750APN MDO9750ASN

Appearance 外观图



Dimensional Drawing 轮廓尺寸图 Unit:mm

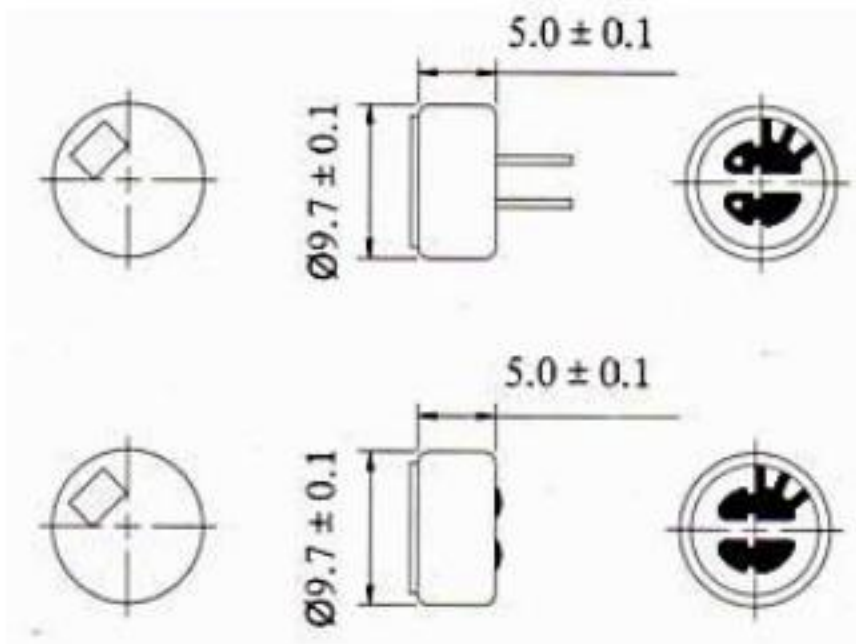

Sensitivity Range 灵敏度范围


Min -48dB
 Max -34dB
 (0dB=1V/Pa, 1KHz, 3V/2.2KΩ)

Specification 规格

Directivity : Omnidirectional
 Output impedance : Low impedance
 Frequency range : 50-16,000Hz
 Operating voltage range: 1.5V-10V
 Current consumption : Max 0.5mA
 S/N Ratio : More than 60dB
 (SPL=1Pa, 1KHz, A-weighting)

指向性 : 全指向
 输出阻抗 : 低阻抗
 频率范围 : 50-16,000Hz
 工作电压 : 1.5V-10V
 消耗电流 : 最大0.5mA
 信噪比 : 大于60dB
 (A 计权)

Typical Frequency Response Curve 频响曲线

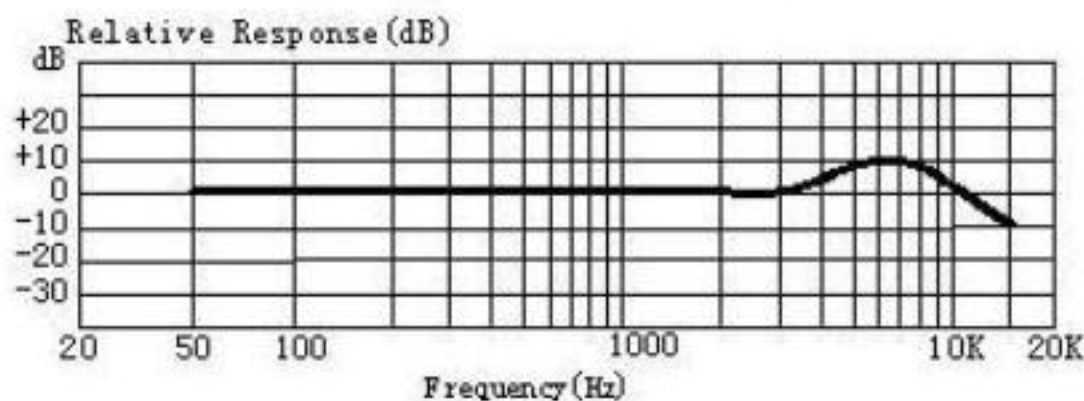

Schematic Diagram 测试电路

