


TELEPHONE CORDS:

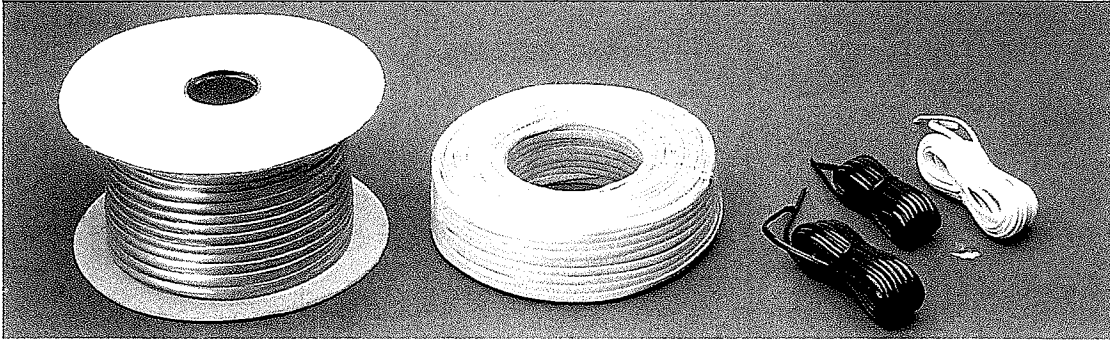

JACKET : PVC
 INSULATION : POLY PROPYLENE (PP)

STANDARD COLOR:

IVORY, WHITE, CREAM, SILVER SATIN, RED, BLACK, BEIGE, GREEN, BLUE, TRANSPARENT, BROWN, ALMOND.
 SPECIAL COLORS ARE ALSO AVAILABLE.

CONDUCTOR:

COPPER WIRE: 26 AWG/7 WIRES STRANDED
 TINSEL WIRE: 4 WIRES OF T250 X H STRANDED
 (T250 X H= TETRON 250 DENIL CENTRED WRAPPED WITH WINDING COPPER FOIL)

ELECTRICAL CHARACTERISTICS:



- CONDUCTOR RESISTANCE < 2.0 OHM/METER
- INSULATION RESISTANCE > 100 MOHM
- DIELECTRIC WITHSTANDING VOL. > 500 Vac

MECHANICAL CHARACTERISTICS:

- PLUG PULL FORCE > 8.16 KGS
- TERMINAL CRIMPING STRENGTH > 2.00 KGS

PACKAGE OF TEL CORD:

- 1) WITH SPOOL : 100M, 200M, 300M / ROLL
 - 2) WITH PE FILM : 100M, 200M, 300M / ROLL
 - 3) WITH CABLE TIE : 2M, 3M, 4.2M, 7.5M, 15M, 30M.
- SPECIAL REQUIREMENTS ARE ALSO WELCOME.

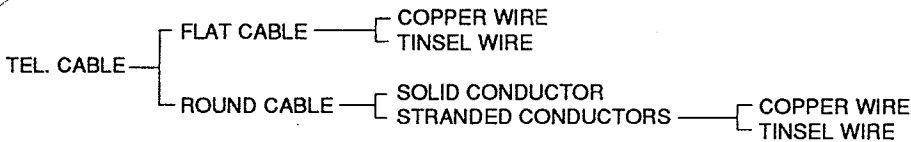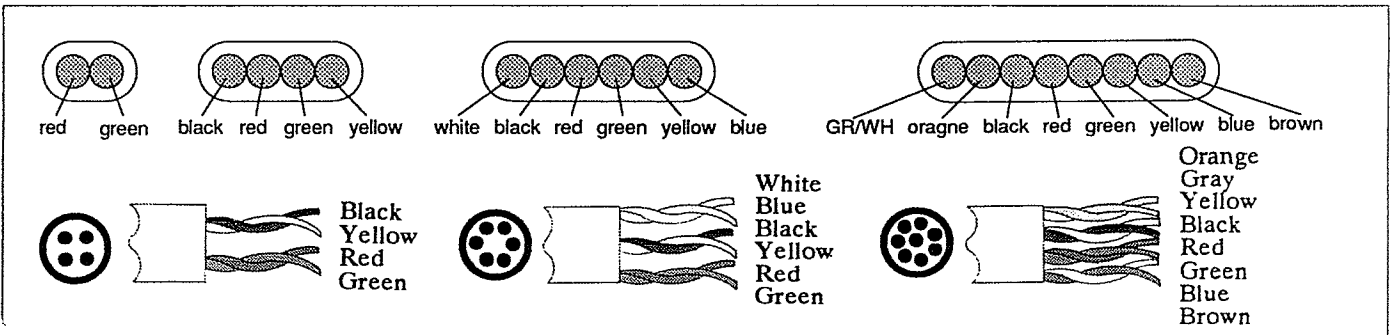

O.D. OF JACKET:

FLAT CABLE: 2C, 4C, 6C, 8C
 2C - 3.6x2.5 mm (SMALL O.D.)
 - 5.0x2.5 mm (STD O.D.)
 4C - 5.0x2.5 mm
 6C - 7.0x2.5 mm
 8C - 9.0x2.5 mm

ROUND CABLE:
 2C - 3.5 mm
 4C - 3.8 mm
 6C - 4.4 mm
 8C - 5.0 mm

CONDUCTORS:

COPPER WIRES:
 26 AWG/7 STRANDED
 28 AWG/7 STRANDED

TINSEL WIRES
 4 X T250 X H STRANDED

SOLID CONDUCTOR:
 0.5mm x 1 OR
 0.6mm x 1

weight 4,5 kg