

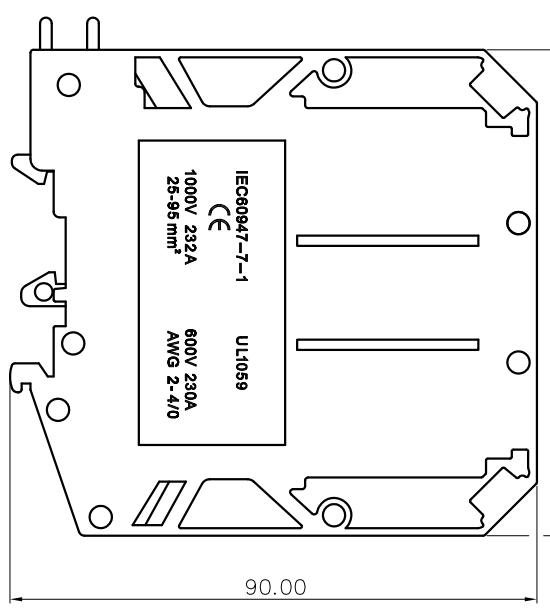


83.00

25.00

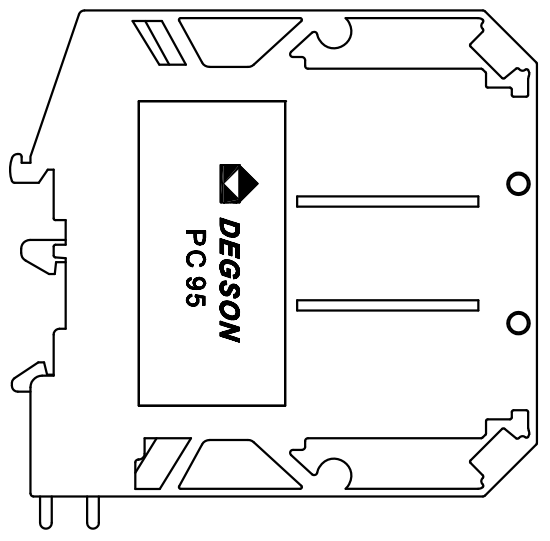

90.00

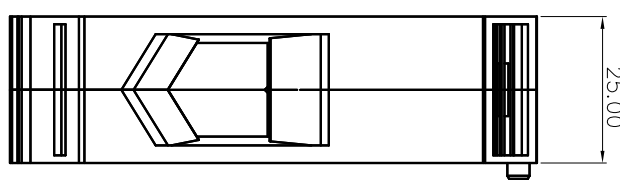

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

UL Standard

1. Rated Voltage/Current : 600V / 230A

2. Withstanding Voltage : AC2200V/1Min.

3. Torque Value : M8 , 221.5lb.in

4. Wire Range : 2~4/0AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	8.0kV
Rate Voltage(V)	1000V
Rate Current(A)	232A

2. Torque Value : M8 , 25N.m

3. Wire Range : 25~95mm<sup>2</sup>

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009

2. Pitch : 25.0mm, Poles : N=01P

3. Stripping length : 33-34mm

4. Operating temperature: -40°C~+105°C

5. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range			
	Over	Over	Over	Over
6	10	30	60	100
TO	TO	TO	TO	TO
6	10	24	30	60
100	150	150	150	150
±0.15	±0.20	±0.30	±0.50	±0.70
±1.00	±1.30	±1.30	±1.30	±2*

6. RoHS Compliance

PC95 - 01P - 1Y - 00A (H)  
 (Series No.) (Poles) (Single Pitch) (Color) :1 (RoHS)  
 00A-(Standard)

- 1. (Grey)
- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	PC95-01P-1Y-00A(H)
APPD:	/	APPD:	NINGBO DEGSSON ELECTRICAL CO., LTD
CHKD:	/	CHKD:	宁波高松电子有限公司
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1

