


MODULAR PLUG

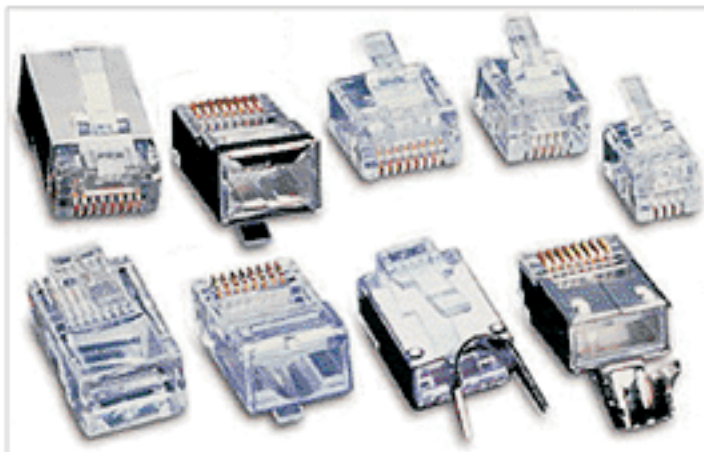


MATERIAL:

*Housing: Polycarbonate, UL94V-2

*Contact: 1. High strength copper alloy (JIS C5191R-H)

2. Plating specification is based on 100 micro inches nickel under-plated and selective Gold plate in contact area. Gold thickness is according to the customer's required.

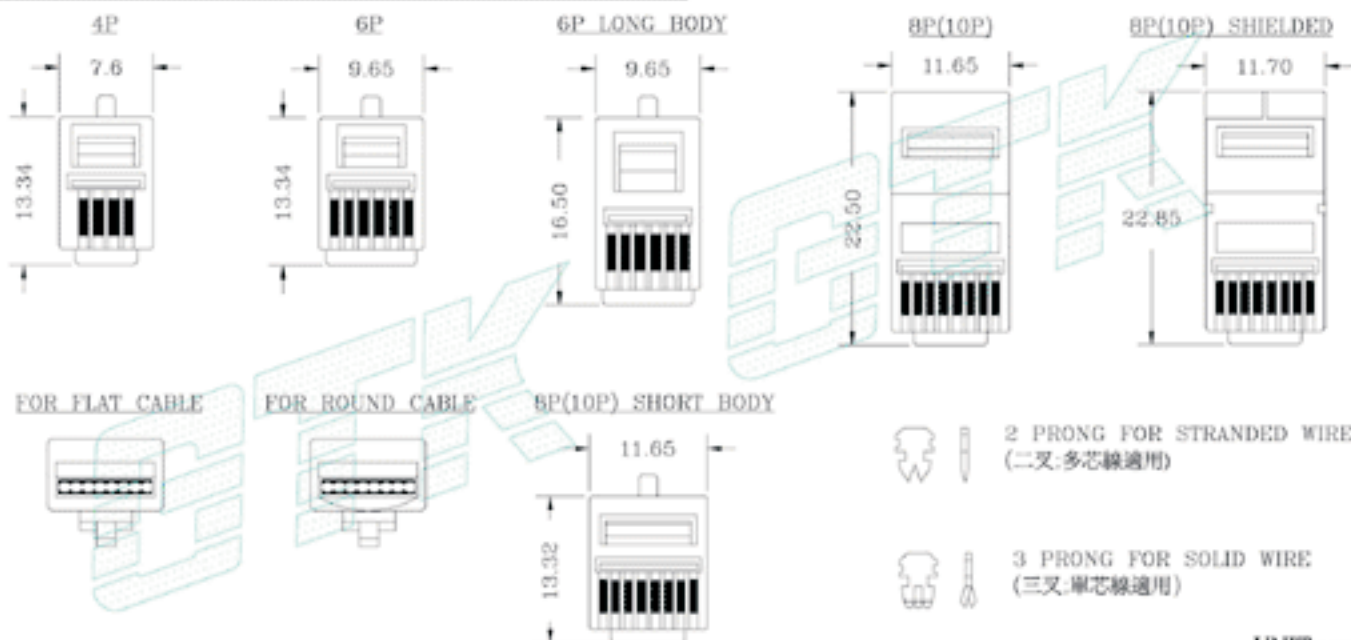

UNIT : mm

Ordering Information



1. MODULAR TYPE (模組規格):

4P2C, 4P4C
6P2C, 6P4C, 6P6C
8P8C, 8P8CS (SHIELDED)
10P10C, 10P10CS (SHIELDED)

PS: STANDARD

1. FLAT CABLE AVAILABLE (扁線適用)
2. 2 PRONG FOR STRAND WIRE (二叉:多芯線適用)
3. CONTACT: GOLD PLATING 3μ" (鍍金3μ")

2. OTHER TYPE (其他規格)

R = ROUND CABLE AVAILABLE (圓線適用)
O = 3 PRONG FOR SOLID WIRE (三叉:單芯線適用)
L = LONG BODY; 4P & 6P ONLY (長本體)
M = SHORT BODY; 8P & 10P ONLY (短本體)
DEC = DEC TYPE (偏頭型)
H = HIROSE TYPE
I1 = INSERT TYPE SINGLE ROW (嵌入式:單排)
I2 = INSERT TYPE DOUBLE ROW (嵌入式:雙排)
6μ", 15μ", 30μ", 50μ" = GOLD PLATED (特殊鍍金厚度)

PS: 8P8CS / R / 30μ" = 8P8C MODULAR PLUG WITH SHIELDED TYPE ROUND CABLE AVAILABLE AND GOLD PLATED 30μ"