




SPECIFICATIONS

Current Rating: 3Amps/Contact Max.
 Voltage Rating: 60V AC/DC
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 500V AC for 1 minute
 Temperature Range: -45°C to +105°C


MATERIAL

Contact: Beryllium Copper(BeCu), Gold plated
 Sleeve: Brass, Tin plated
 Insulator: PBT/NY46, UL94V-0

ORDER INFORMATION

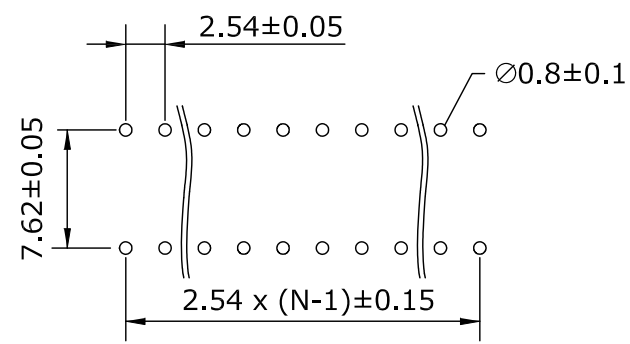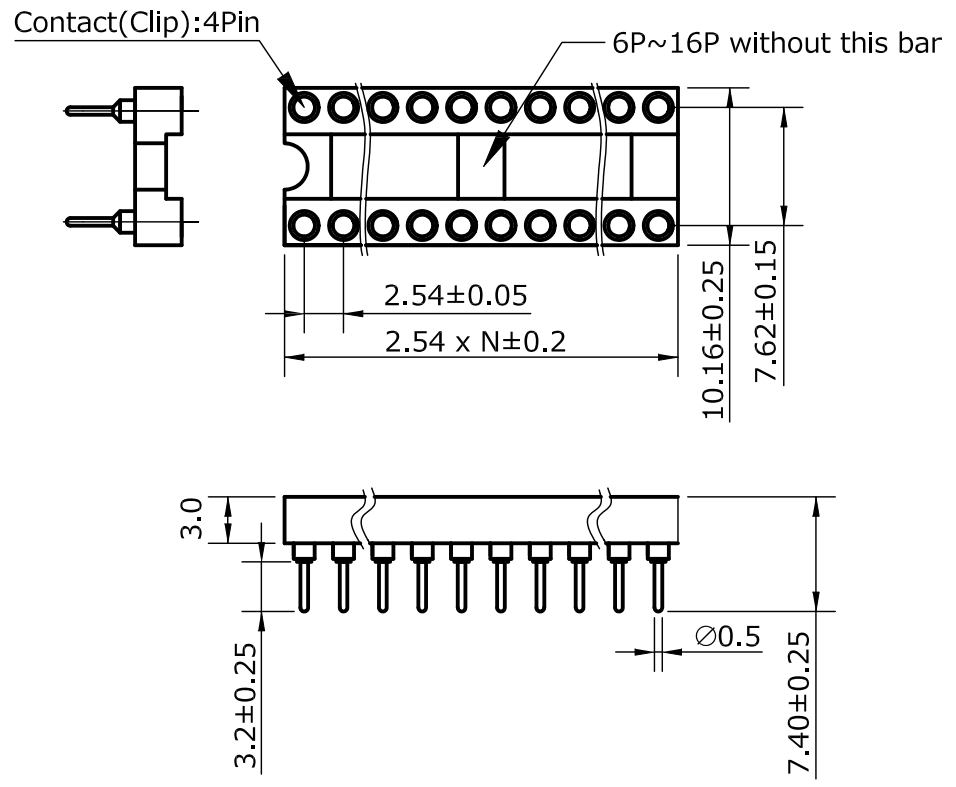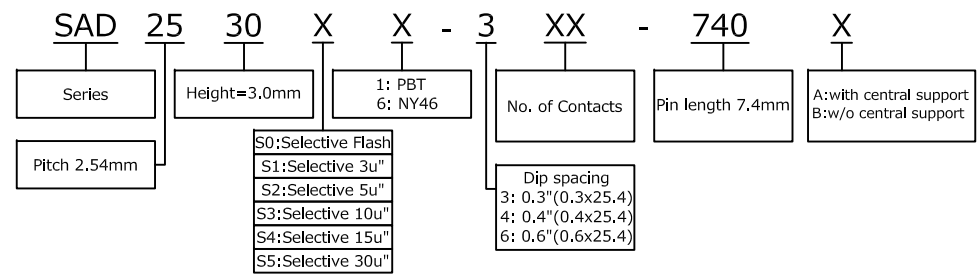

P.C.B LAYOUT

 <p>Morecrafts Tel: +886-2-2966-1326 Fax: +886-2-2966-1352</p>	PART NO.	SAD2530XX-3XX-740X	DRAWN	Andrew							
	DRAWING NO.	SAD2530XX-3XX-740X	CHECKED	Claudia							
	DATE	2019/06/04	APPROVED	Brian							
TITLE:	Machine Pin IC Socket 2.54mm	REV. A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.	DESCRIPTION	DATE