


FOSHAN NANHAI HENGLIDA INDUSTRY CO. LTD

SP12A


voltage/ Frequency	Power	Insulation Class	Average Flow rate	Max pressure	20cm Noise	Working Temp	working Mode	certificate	
volt/Hz	watt	\	ml/min	Bar	dBA	Δ T (k)	min	\	\
230/50	18	F	60-230	2-5	≤55	98	Continuous		ROHS
120/60	18								ROHS
100/50-60	18								ROHS

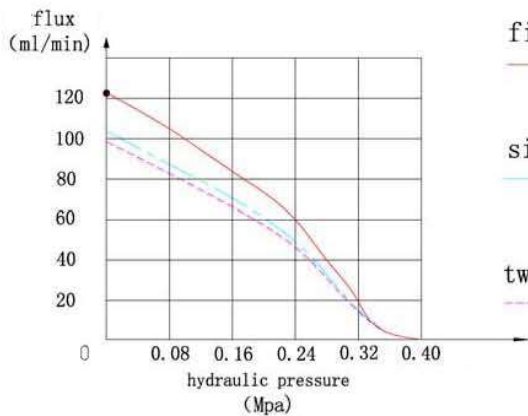

first minute

sixth minute

twelfth minute

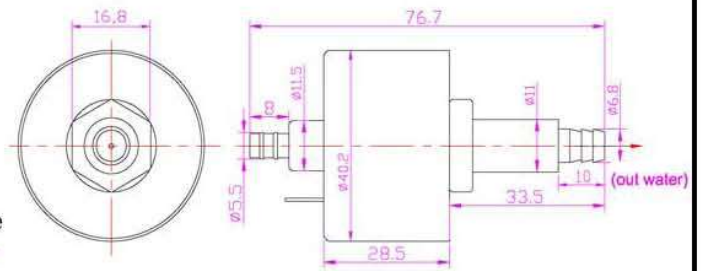

Feature	Material	Application
Alternating current	nozzle: PA66	fog Generators
Water	Piston: SUS	Steam mop
lead: 20AWG	Springs: SUS	Carpet Cleaners
	Rubber parts: NBR	Steam Generators
	Diode: IN4007	Steam iron
low noise	Magnet wire: Class F	vending machines
length life	Bobbin: PA66	hairdressing Machines