

Isc N-Channel MOSFET Transistor

SSS7N60B

• FEATURES

- With TO-220F package
- Low input capacitance and gate charge
- Low gate input resistance
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• APPLICATIONS



- Switching applications
- Load switch
- Power management

• ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	600	V
V_{GSS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-Continuous $T_c=25^\circ\text{C}$ $T_c=100^\circ\text{C}$	7.0 4.4	A
I_{DM}	Drain Current-Single Pulsed	28	A
P_D	Total Dissipation @ $T_c=25^\circ\text{C}$	48	W
T_j	Max. Operating Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55~150	$^\circ\text{C}$

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(ch-c)}$	Channel-to-case thermal resistance	2.6	$^\circ\text{C}/\text{W}$
$R_{th(ch-a)}$	Channel-to-ambient thermal resistance	62.5	$^\circ\text{C}/\text{W}$

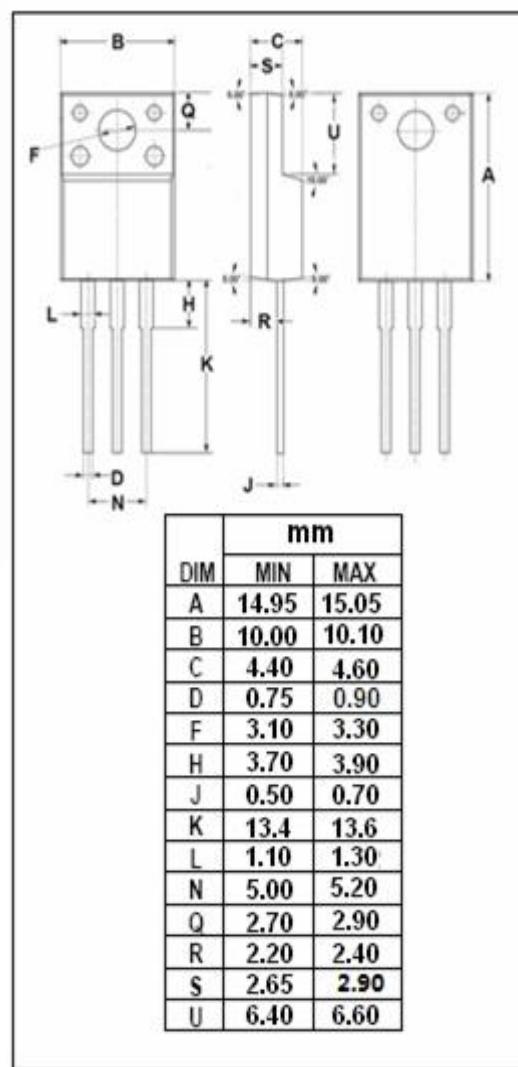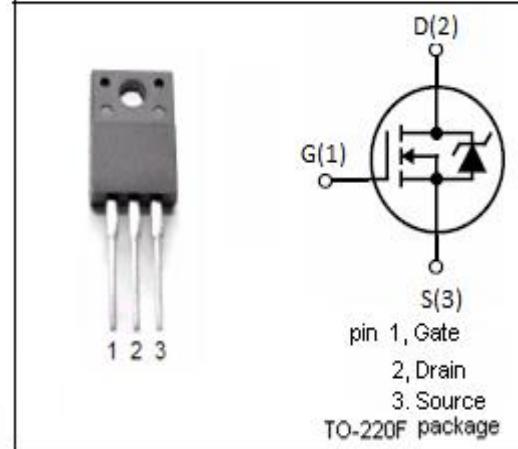

Isc N-Channel MOSFET Transistor
SSS7N60B
ELECTRICAL CHARACTERISTICS

T_c=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V; I _D = 0.25mA	600			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} ; I _D =0.25mA	2.0		4.0	V
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} = 10V; I _D =3.5A		1.0	1.2	Ω
I _{GSS}	Gate-Source Leakage Current	V _{GS} = ±20V; V _{DS} = 0V			±0.1	μ A
I _{DSS}	Drain-Source Leakage Current	V _{DS} =600V; V _{GS} = 0V; T _c =25°C V _{DS} =480V; V _{GS} = 0V; T _c =125°C			10 100	μ A
V _{SDF}	Diode forward voltage	I _{SD} =7A, V _{GS} = 0 V			1.4	V