



P.C.B Holes Diagram
(BOTTOM VIEW)

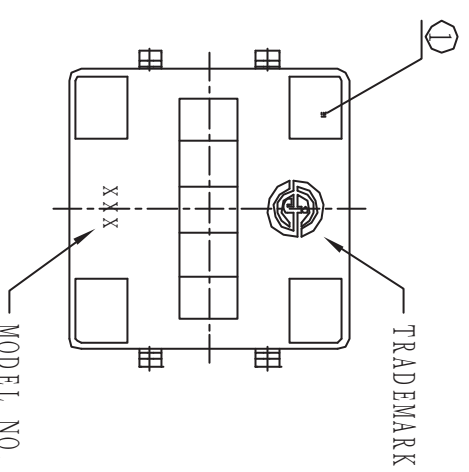

Circuit Diagram

OPERATION FORCE SPECIFICATION			Hn
others	260±50gf	200±50gf	160±50gf
			(Value)
			4.3
			4.5
			5.0
			5.3
			5.5
			6.0
			7.0
			7.5
			8.0
			8.5
			9.0
			9.5
			10.0
			10.5
			11.0
			12.0
			12.5
			13.0
			14.0
			14.3
			15.0
			17.0
			18.0
			22.0
			others

Dimension Size	Tolerances
L ≤ 1	±0.15
1 < L ≤ 8	±0.20
8 < L ≤ 23	±0.25
23 < L ≤ 50	±0.30

NO.	PART NAME	Q'TY	MATERIAL (THICKNESS, COLOR)	REMARK
1	COVER	1	Fe T=0.3	Coating Silver (ROHS COMPLIANT)
2	SPRING	1	PHOSPHOR BRONZE (QSn6.5-0.1Y)	Coating Silver (ROHS COMPLIANT)
3	TERMINAL	4	BRASS (H65 Y 0.3t)	Ag-plated (ROHS COMPLIANT)
4	STEM	1	(Black) PC 94HB	ROHS COMPLIANT
5	HOUSING	1	(Black) PA66 94HB	ROHS COMPLIANT

TD-12EA

Medium No.
Original Drawing No.
Sign Date