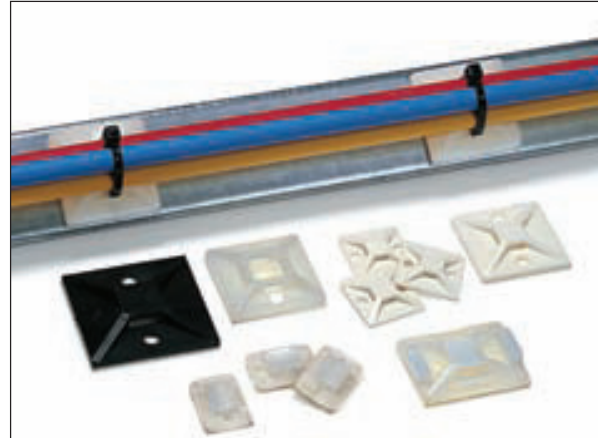## TY Self Adhesive Cable Tie Mounts
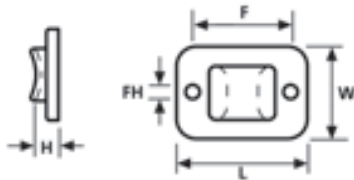
Features and Benefits

TY mounts are particularly suitable for applications with minimal space - they are mounted into the equipment prior to cable installation. The cables can be attached using a range of standard cable ties.

Application

These products are designed for simple, yet robust, installation in a wide variety of applications - particularly used in telecoms equipment, switchgear and control cabinets.

Cable Tie Mounts MB and TY

Cable Tie Mounts TY3G1 (S)

Cable Tie Mounts TY8G1 (S)

Material Data

Material	Polyamide 6.6 (PA66)
Colour	Black (BK), Natural (NA)
Operating Temperature	-40°C to +105°C Continuous, (+145°C for 500 h)
Flammability	UL94 V2

RoHS

HF (halogenfree)

Product Selection

Code	Length (L)	Width (W)	Height (H)	Fixing Hole Ø (FH)	Fixing Hole Centres (F)	Strap Width max. (G)	Material	Colour	Adhesive
TY3BK	20.0	14.0	3.7	2.2	15.0	4.0	PA66	Black (BK)	–
TY3NT	20.0	14.0	3.7	2.2	15.0	4.0	PA66	Natural (NT)	Acrylate
TY8BK	32.0	25.0	5.2	3.2	15.0	8.0	PA66	Black (BK)	–
TY8NT	32.0	25.0	5.2	3.2	15.0	8.0	PA66	Natural (NT)	Acrylate

All dimensions in mm. Subject to technical changes.

UL Please Note for Product Specific Approvals please refer to Appendix.