



| REV | LTR | DESCRIPTION | DATE | APPROVED |
|-----|-----|-------------|----------|----------|
| A0 | | | | |
| A1 | | | 20181028 | LDD |

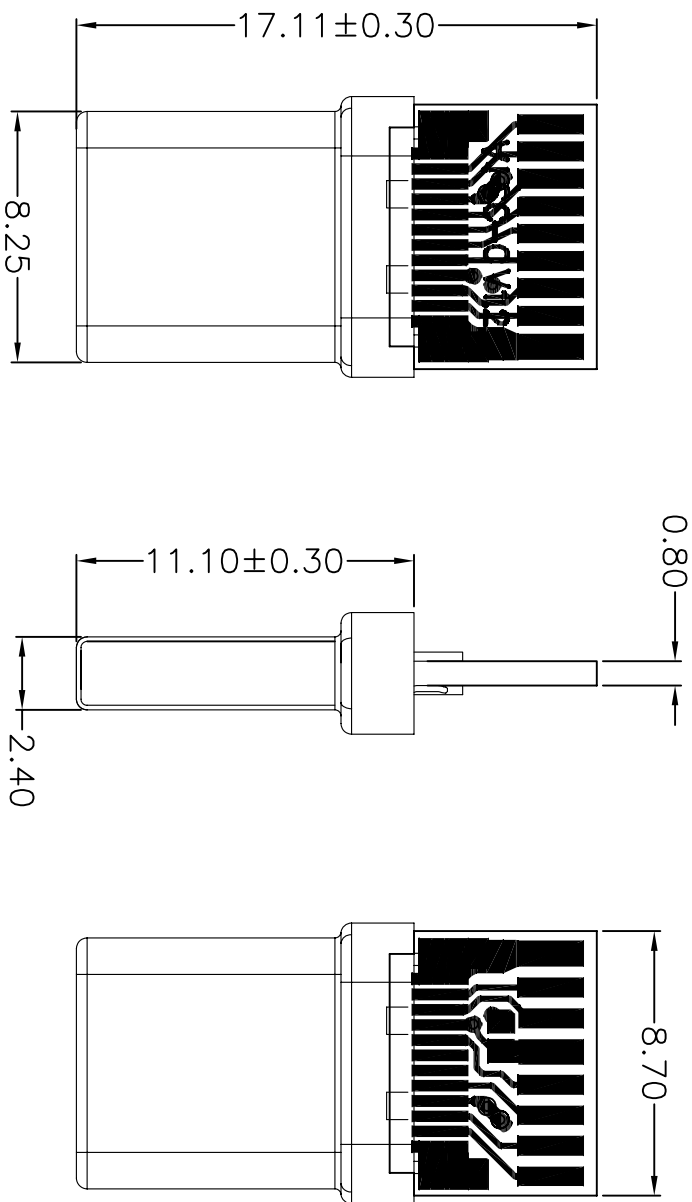

| | | |
|------------------|---|------|
| A4, B4, A9, B9 | — | Vbus |
| B11 | — | RX1+ |
| B10 | — | RX1- |
| B8 | — | SBU2 |
| B5 | — | CC2 |
| B3 | — | TX2- |
| B2 | — | TX2+ |
| A11 | — | RX2+ |
| A10 | — | RX2- |
| A8 | — | SBU1 |
| A7 | — | D- |
| A6 | — | D+ |
| A5 | — | CC1 |
| A3 | — | TX1- |
| A2 | — | TX1+ |
| A1, B1, A12, B12 | — | GND |

- 备注:
- 1.材质
 - 1.1 胶芯: LCP+30%GF UL94V-0
 - 1.2 端子: C70P5, T=0.15mm; 镀半金锡
 - 1.3 外壳: 不锈钢, T=0.15mm; 表面镀镍
 - 1.4 卡钩: 不锈钢, T=0.30mm; 表面镀镍
 - 1.5 弹片: 不锈钢, T=0.10mm
 - 2.主要特性:
 - 2.1 额定电流: 0.5A
 - 2.2 接触阻抗: 40mΩ MAX
 - 2.3 绝缘阻抗: 100MΩ MIN 250V DC
 - 2.4 耐压测试: 100V AC
 - 2.5 沾锡性: 温度250±5℃
 - 2.6 整体插入力: 2.0kgf MAX
整体拔出力: 0.8kgf MIN
 - 2.7 使用寿命: 10000次
 - 2.8 工作温度: -30℃~+80℃

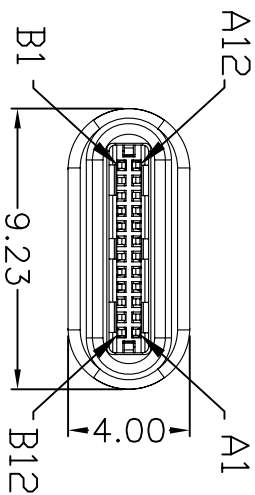

TOLERANCES

| | |
|--------|--------|
| .X | ±0.30 |
| .XX | ±0.20 |
| .XXX | ±0.10 |
| ANGLES | ±3.00° |

TITLE: USB TYPE C 控伸款 SC-C 无电容
DRAWING NO.: 811119-001

| | | | | | |
|--------|--------|-------|-------|--------|--------|
| APPD: | REV: | SIZE: | UNIT: | SCALE: | SHEET: |
| | A/1 | A4 | MM | 1:1 | 1/1 |
| CHECK: | DRAWN: | | | | |