

### SPECIFICATIONS





Current Rating: 4A AC/DC  
 Voltage Rating: 250V AC/DC  
 Contact Resistance: 10m Ω Max  
 Insulation Resistance: 1000M Ω Min  
 Withstanding Voltage: 1000V AC for 1 minute  
 Temperature Range: -25°C to +85°C  
 Contact : Brass, Tin plated  
 Insulator: NY66, UL94V-2

### ORDER INFORMATION

W 2542L - XX



PIN NO.	Dimension	
	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64

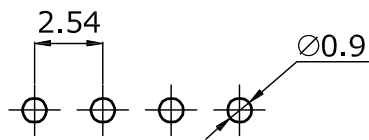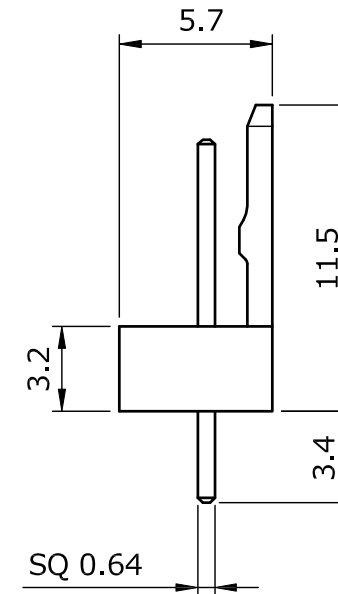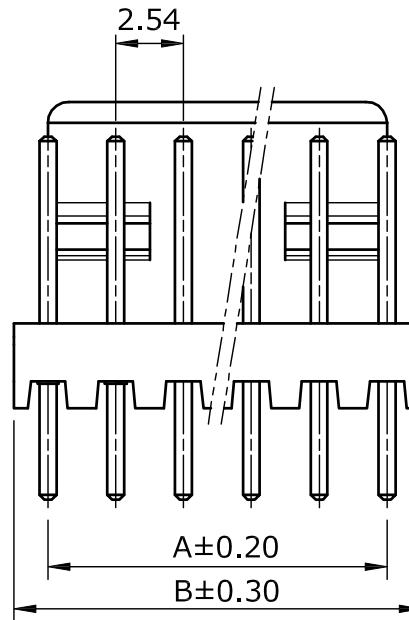

Recommended PCB Layout

**M** Morecrafts Technology  
 TEL: +886-2-2966-1326  
 FAX: +886-2-2966-1352  
 www.morecrafts.com.tw

PART NO.	W2542L-XX	DRAWN	Andrew
DRAWING NO.	W2542L-XX	CHECKED	Claudia
DATE	2019/09/19	APPROVED	Brian

TITLE:	2.54mm pitch Wafer	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm
--------	--------------------	------	----	-----------	-----------------------	-------	-----	------	----