
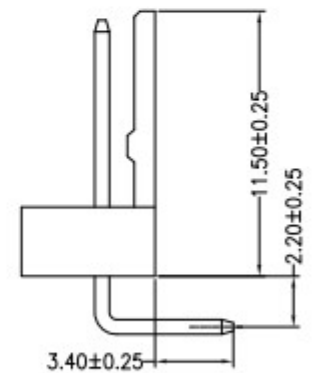
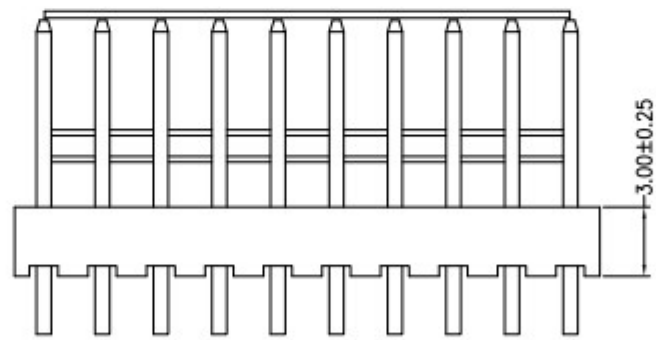
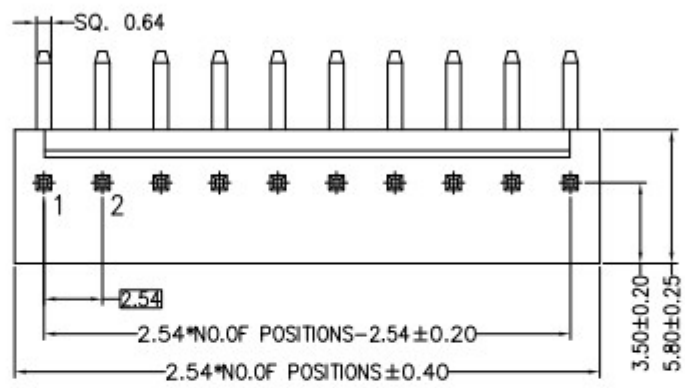
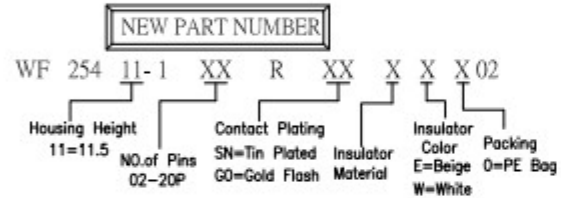


NOTES:
 Voltage Rating:250V,AC/DC
 Current Rating:2.5 AMP,AC/DC
 Dielectric Withstand Voltage:500V,AC/Minute
 Contact Voltage:20 mΩ Max
 Insulation Voltage:1000 mΩ Min
 Operation Temperature:-25°C to +85°C
 Insulator Material:Polyester,UL94 V-0
 Contact Material:Brass
 Contact Plating: Au or Sn Plated on Nickel Overall

Recommend P.C.C Layout(Top Side)
 (PCB Board Tolerance ±0.05)

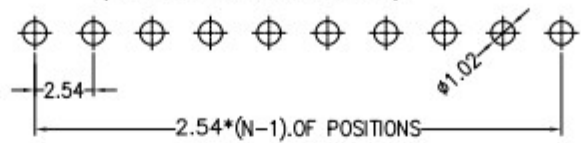

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	Helen	2007/10/21
				DIM	TOL			
				X.X	±0.40	DESIGN	Jenny	2007/10/21
				X.XX	±0.25	CHECK	Franck	2007/10/21
				X.XXX	±0.15	APPROVE	Steven	2007/10/21
A0	2007/10/21	NEW		Angle	±3'			

LPI 深圳市起德电子科技有限公司
 SHEN ZHEN QIDE ELECTRONIC TECHNOLOGY CO.,LTD

PART NO.	WF25411-1XXRXXXXX02	UNIT	mm
TITLE	2.54mm Wafer 90°DIP,H=11.5	SCALE	1:1
Customer NO.	---	SHEET	1/1
		PROJ.	☉