
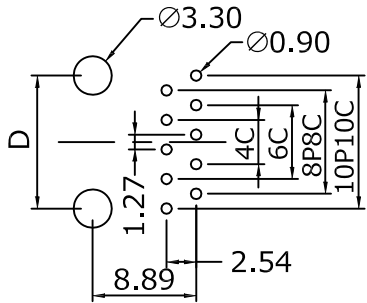



SPECIFICATIONS

Current Rating: 1.5AMP
 Voltage Rating: 125V AC/DC
 Contact Resistance: 30m Ω Max
 Insulation Resistance: 500M Ω Min
 Withstanding Voltage: 1000V AC for 1 minute
 Temperature Range: -40°C to +85°C
 Durability: 750 cycles Min
 Contact : Phosphor Bronze, Gold plated over nickel on contact area, Tin plated on solder area
 Insulator: PBT, UL94V-0


ORDER INFORMATION

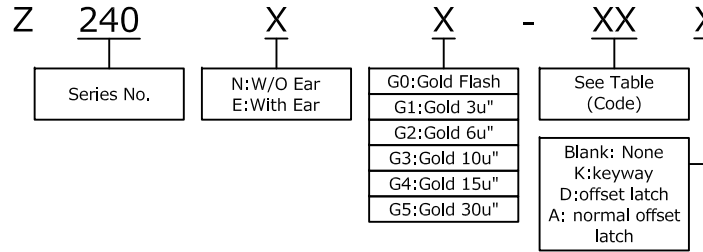

PCB LAYOUT/TOP VIEW




E: with Ear




N: w/o Ear


Special Options







K: keyway
(8P, 10P only)



D: offset latch
(6P only)



A: normal & offset latch
(6P only)

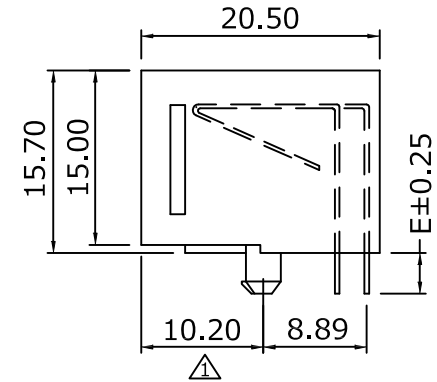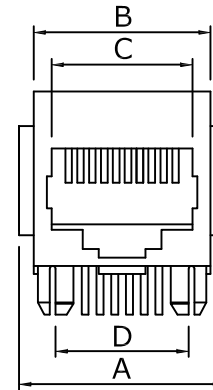

Code	Position	Position	A	B	C	D	E
44	4P	4C	13.55	11.15	7.70	7.62	3.50
6(2/4/6)	6P	2C / 4C / 6C	15.60	13.15	9.90	10.16	3.50
8(4/6/8)	8P	4C / 6C / 8C	17.60	15.20	11.95	11.43	4.00
1010	10P	10C	17.60	15.20	11.95	11.43	4.00



PART NO.	Z240XX-XXX	DRAWN	Andrew
DRAWING NO.	Z240XX-XXX	CHECKED	Claudia
DATE	2007/04/25	APPROVED	Brian

TITLE:	Jack Side Entry H=15.7 W=20.5	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.	1	Drawing updated	2018/1/18
												DESCRIPTION	DATE