




Specification for:
ZP49715TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

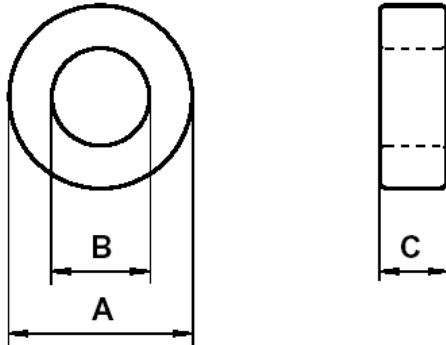

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	102	100.3	104.5
I.D. (B)	65.8	64.1	66.9
Ht. (C)	15.0	14.6	16.0

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
267.2	255.3	68821

INDUCTANCE

AL value (nH/T ²)	Test conditions
3464 ± 25%	10kHz, 0.5 mT (For N = 5, use 0.98 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
9428 mW (137 mW/cm ³)	8603 mW (125 mW/cm ³)	100 kHz, 100 mT, 100°C
-	-	-

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 2000 V Min Wire-to-Wire.