


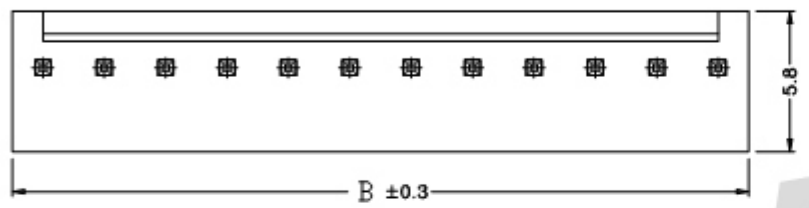


- 技术参数 SPECIFICATIONS
- ◆ 适用线径: AWG#28~#22
 - ◆ Applicable Wire: AWG#28~#22
 - ◆ 额定电压: 250V DC,AC(rms)
 - ◆ Rated voltage: 250V DC,AC(rms)
 - ◆ 额定电流: 2.5A AC,DC
 - ◆ Rated Current: 2.5A AC,DC
 - ◆ 耐压值: 1500V AC/minute
 - ◆ Withstand voltage: 1500V AC/min.
 - ◆ 工作温度: -25°C ~ +85°C
 - ◆ Working Temp: -25°C ~ +85°C
 - ◆ 绝缘电阻: > 1000 MΩ
 - ◆ Insulation resistance: > 1000 MΩ
 - ◆ 接触电阻: ≤ 20mΩ
 - ◆ Contact resistance: ≤ 20mΩ
 - ◆ 绝缘体: 尼龙66, UL94-V0
 - ◆ Insulator: Nylon66, UL94-V0
 - ◆ 接触针: 黄铜
 - ◆ Contact PIN: Brass

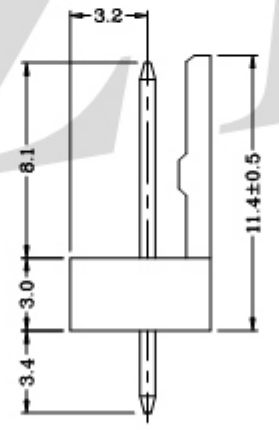

P.C.B LAYOUT

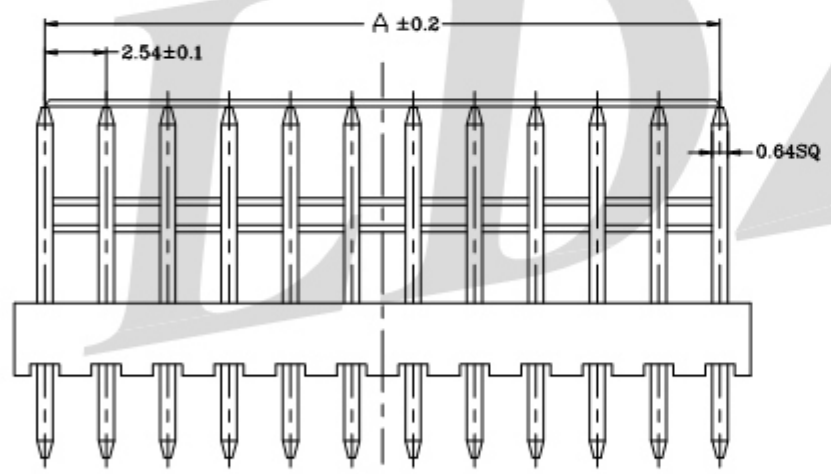

A2542 W V - NP - NO WH T
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: V- Straight 180°
- ④ Circuit No.: 02-2PIN..20-20PIN
- ⑤ Material: NO-Nylon66,UL94V-0;
- ⑥ Color: WH-White,
- ⑦ Plating Method: T-Tin-plated,

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2542WV-02P	2.54	5.08
A2542WV-03P	5.08	7.62
A2542WV-04P	7.62	10.16
A2542WV-05P	10.16	12.70
A2542WV-06P	12.70	15.24
A2542WV-07P	15.24	17.78
A2542WV-08P	17.78	20.32
A2542WV-09P	20.32	22.86
A2542WV-10P	22.86	25.40
A2542WV-11P	25.40	27.94
A2542WV-12P	27.94	30.48
A2542WV-13P	30.48	33.02
A2542WV-14P	33.02	35.56
A2542WV-15P	35.56	38.10

一般公差
GENERAL TOLERANCE
.X ±0.3
.XX ±0.2
.XXX ±0.1

LDZY® 东莞市蓝雁电子有限公司
DongGuan LDZY Electronics CO.,LTD.

料号 PART NO
A2542WV-NP-NOWHT
品名 TITLE
2.54mm Crimp Style connectors

核准 APPD 审核 CHK 绘图 DR 日期 DATA

2011/06/30 A B 修改图框格式