


SWITCH TYPE	Micro Switches	MODEL NO.	B1753X1
-------------	----------------	-----------	---------

1. Functional spec.			
1.1 Rated Voltage	125VAC 1A/DC5V 30mA	1.6 Free Position	10.4 ± 0.8mm
1.2 Rated Current	30mA	1.7 Operating Position	8.8 ± 0.8mm
1.3 Contact Resistance	≤ 50mΩ	1.8 Position Travel	
1.4 Operating Force	30 ± 15gf	1.9 Return Force	
1.5 Bounce Time		1.10	
2. Reliable Rating			
2.1 Mechanical Life	500,000 cycles	2.5 Soldering Technic	Hand Soldering
2.2 Electrical Life	10,000 cycles	2.6 Operating Temper	-25°C ~ +65°C
2.3 Insulation Resistance	≥ 100MΩ DC500V	2.7 Ambient Humidity Used	< 85%RH
2.4 Withstand Voltage	AC500V 1 Minute	2.8	

3. Dimension Drawing

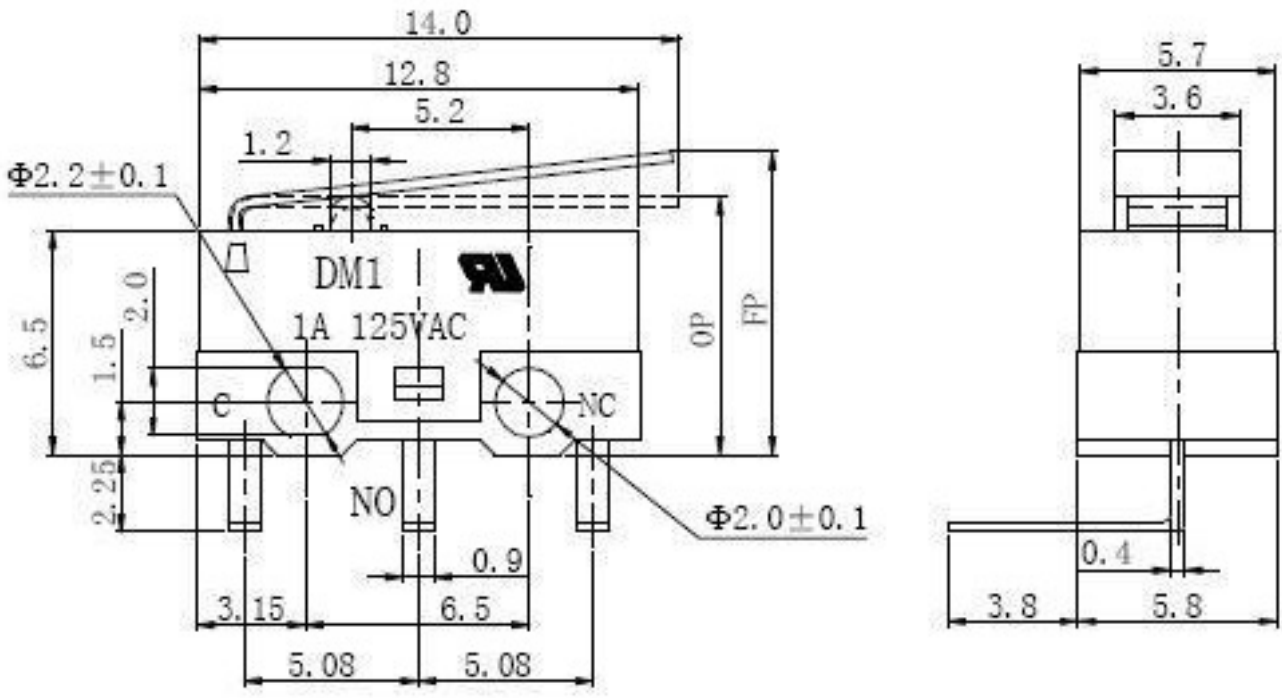

SCHEMATIC

