

CONQUER

In-Line Fuse Holder

Specification Guide Codes:

A = Item Number

B = Rated Current

C = Insulation Resistance At 500 V DC

• Contact : Brass, Tin / Nickel Plated

• With Other Wire Size Or Lengths Available On Special Order.

• To Install Fuses With "Loop" Type Wires, Simply Cut Loop Into Two Separate Wires Of Desired Length.

D = Contact Resistance

E = Dielectric Strength For 60 Seconds

F = Body Material

G = Supply Standard UL Wire-AWG/Length

IN-LINE FUSE HOLDER FOR 1/4"x1-1/4 (6.3x32mm or 6.3x30mm) FUSE



CQ-209P

B: 5A

C: 100MΩ Min


D: 5mΩ At 1A DC

E: AC1000V Min.


F: P.P.

G: 18#AWG / 8"Loop

Bayonet Type

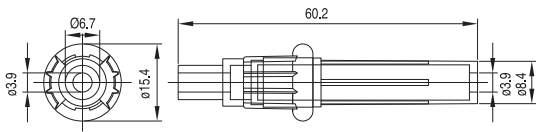

HOT



CQ-209V

B: 40A

C: 100MΩ Min


D: 5mΩ At 1A DC

E: AC2000V Min.

F: Nylon With Fiber Glass

G: 12#AWG / 8"Loop

Heavy Duty Bayonet Type

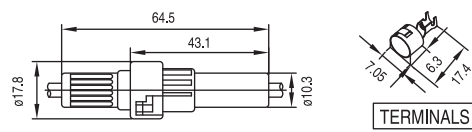

IN-LINE FUSE HOLDER FOR BLADE TYPE FUSE



CQ-211SN RoHS

B: 30A

C: 100MΩ Min

D: 5mΩ At 1A DC


E: AC1000V Min.

F: P.V.C.

G: 12#AWG / 10"Loop

Water Resistant Type

For AST Blade Type Fuses

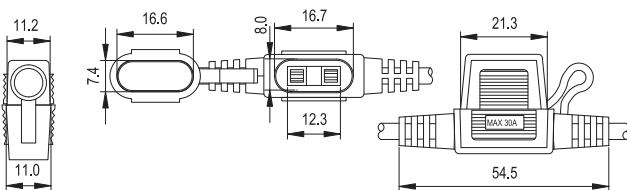

CQ-211MI RoHS

B: 80A

C: 100MΩ Min

D: 5mΩ At 1A DC

E: AC3000V Min.

F: P.V.C.

G: 8#AWG / 5" x 2

Water Resistant Type

For AMT (MAX) Blade Type Fuses

