

DIN41612 C TYPE FEMALE (3ROW 180°)





MATERIAL

- *Housing : 30% Glass Filled PBT UL94V-0.
- *Contact : Phosphor Bronze.

SPECIFICATION

- *Current Rating : 2 AMP.
- *Dielectric Withstanding Voltage : AC 1000V For 1 minute.
- *Insulator Resistance : 1000M Ω min. at DC 500V.
- *Contact Resistance : 30m Ω max. at DC 100mA.
- *Operation Temperature : - 55°C to + 105°C.

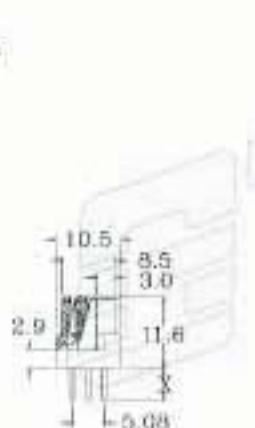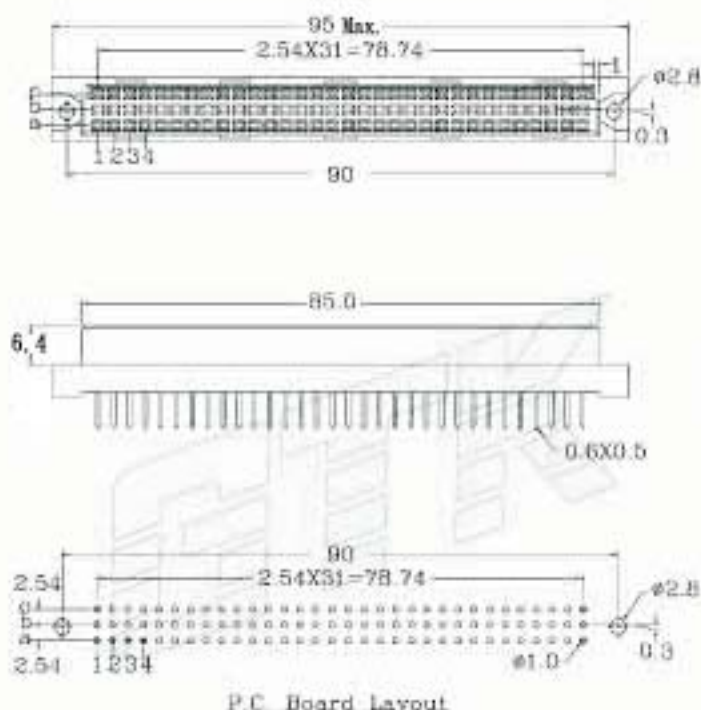

UNIT : mm

X length	1	2	3	4
EN CODE #	4.0	13	2.5	17
Series	D8	D8	D7	D7
Position	96	64	32	48
Rows with Contacts	a b c	a - c	a - -	a b c
Contact Arrange				
Series	D8	D8	D7	D7
Position	96	64	32	48
Rows with Contacts	a b c	a - c	a - -	a b c
Contact Arrange				
Series	D8	D8	D7	D7
Position	96	64	32	48
Rows with Contacts	a b c	a - c	a - -	a b c
Contact Arrange				

Ordering Information STANDARD DIMENSION : SHOW P/N END TO CODE #6
SPECIAL DIMENSION : KEEP SHOWING CODE #7-8 (PS.標準碼為6碼,第7-8碼視需要加註於標準碼後)

D8	F	96	S	T	1	+	B/L	/	10U
1	2	3	4	5	6	7	8		

- | | | |
|---|--|---|
| <p>1.SERIES NO (產品系列)
D8 = DIN41612 C TYPE PITCH:2.54MM (塑膠三排,PITCH:2.54MM)
D7 = DIN41612 C TYPE PITCH:5.08MM (塑膠三排,PITCH:5.08MM)</p> <p>2.CONTACT TYPE (連接器類別):
F = FEMALE (母座)</p> <p>3.POSITION (端子數):
D8 = 96, 64, 32
D7 = 48, 32, 16</p> | <p>4.SERIES TYPE (產品型式)
S = STRAIGHT TYPE (插板式180°)</p> <p>5.CONTACT PLATED (端子電鍍):
T = TIN PLATED ON TERMINAL & GOLD PLATED ON CONTACT (半金鍍)
G = ALL GOLD PLATED (全金)</p> <p>6.PIN TYPE (端子型式):
1 = DIP TYPE LENGTH:4.0MM
2 = WIRE WRAP TYPE LENGTH:13MM
3 = DIP TYPE LENGTH:2.5MM
4 = WIRE WRAP TYPE LENGTH:17MM</p> | <p>7.PARTS OPTION (附件選擇)
B/L = WITH BOARDLOCK (有魚叉)</p> <p>8.SPECIAL TYPE (特殊規格)
10U = 10μ" GOLD PLATED ON CONTACT (鍍金10μ")
PS:STANDARD IS GOLD FLASH BLANK FOR STANDARD (標準品不需標註)</p> |
|---|--|---|