

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications

DIN EN 60 664-1

DIN EN 61 984



Approvals: 

Inserts

- 01. Number of contacts :3+PE
- 02. Rated Current :10A
- 03. Rated Voltage conductor-ground :230V
- 04. Rated Voltage conductor-conductor :400V
- 05. Pollution degree :3
- 06. Rated impulse voltage :4kv
- 07. or:10A/250V/4KV/3¹⁰
- 08. Insulation resistance :≥10Ω
- 09. Material:Polycarbonate
- 10. Colour:RAL 7032(Light grey)
- 11. Rated voltage acc. to UL/CSA:600V
- 12. Limiting temperatures : -40℃~+125℃
- 13. Flammability acc. to UL94:V0
- 14. Mechanical working life (mating cycles) :≥500

Contacts

- 01. Material:Copper alloy
- 02. Surface:hard-silver plated
- 03. Contact resistance :≤2mΩ
- 04. Terminal :Screw terminal
- 05. Wire gauge :1.0-2.5mm² (AWG 18-14)
- 06. Tightening torque :0.25Nm
- 07. Stripping length :4.5mm
- 08. Rohs Compliance

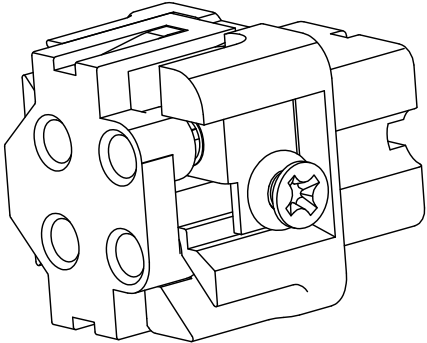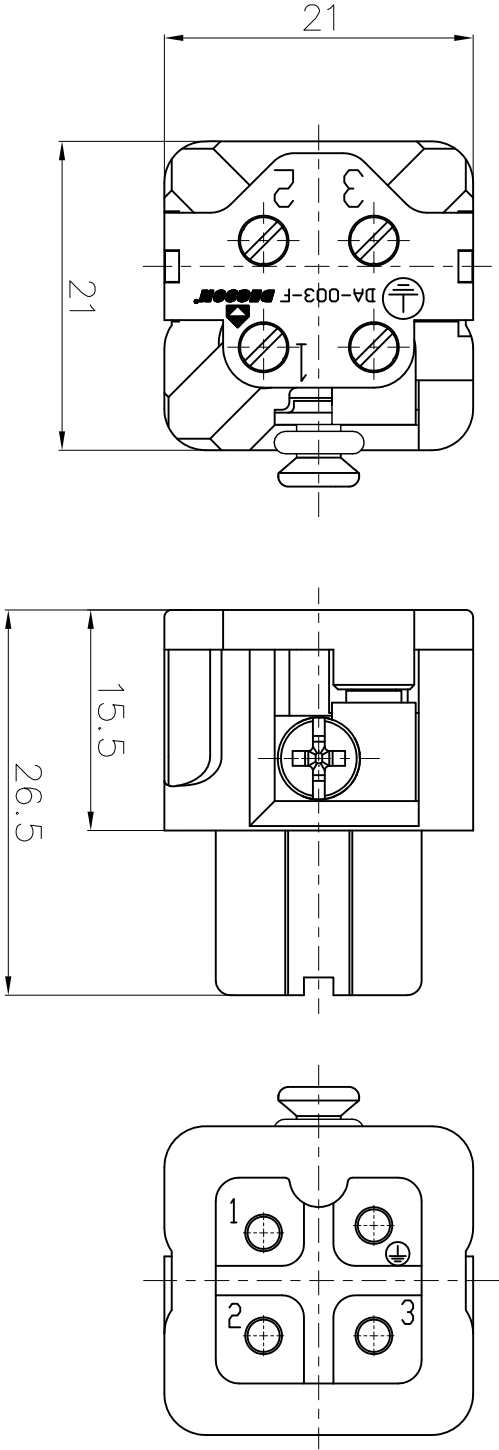

DETACHED LISTS			
PART NO.: DA003F	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
APPD:	NAME:		
CHKD:	DA-003-F		
DRFT: Mr.Yang 2016.06.16	TITLE: CUSTOMER DRAWING		
	DRAWING NO.: DA-003-F-E01	REV	DO-1
	THIRD ANGLE PROJECTION	SHEET	1/1
DO NOT SCALE DRAWING		SCALE	2:1