

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE


Technical characteristics:

Specifications

DIN EN 60 664-1


DIN EN 61 984

Approvals: 

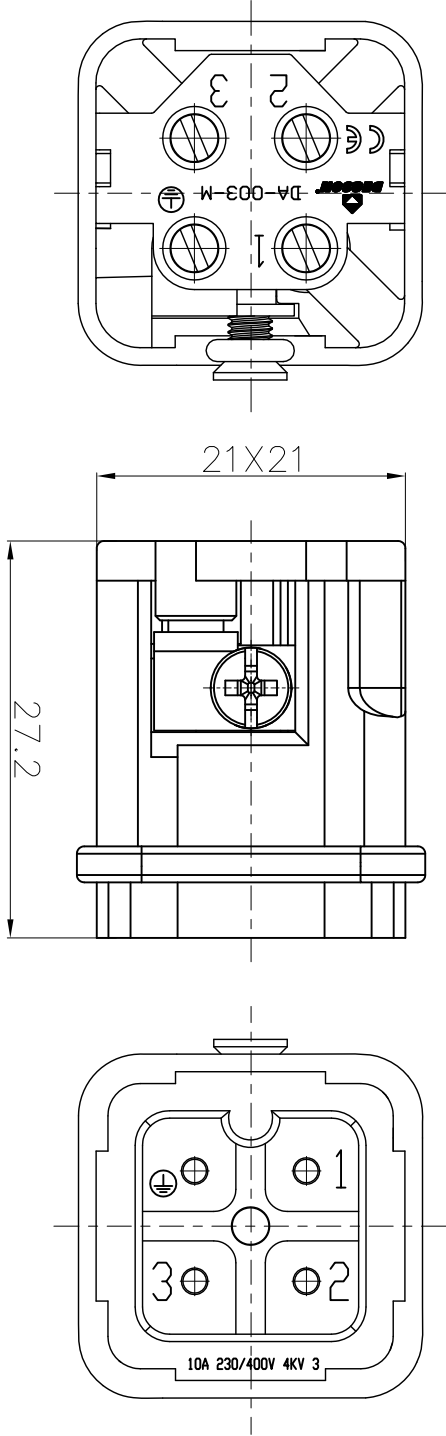

- Inserts
- 01. Number of contacts : 3+PE
 - 02. Rated Current : 10A
 - 03. Rated Voltage conductor-ground : 230V
 - 04. Rated Voltage conductor-conductor : 400V
 - 05. Pollution degree : 3
 - 06. Rated impulse voltage : 4kv
 - 07. or: 10A/250V/4KV/3
 - 08. Insulation resistance : $\geq 10^9 \Omega$
 - 09. Material: Polycarbonate
 - 10. Colour: RAL 7032 (Light grey)
 - 11. Rated voltage acc. to UL/CSA: 600V
 - 12. Limiting temperatures : -40°C~+125°C
 - 13. Flammability acc. to UL94: V0
 - 14. Mechanical working life (mating cycles) : ≥ 500

- Contacts
- 01. Material: Copper alloy
 - 02. Surface: hard-silver plated
 - 03. Contact resistance : $\leq 2m\Omega$
 - 04. Terminal : Screw terminal
 - 05. Wire gauge : 1.0-2.5mm² (AWG 18-14)
 - 06. Tightening torque : 0.25Nm
 - 07. Stripping length : 4.5mm
 - 08. RoHS Compliance

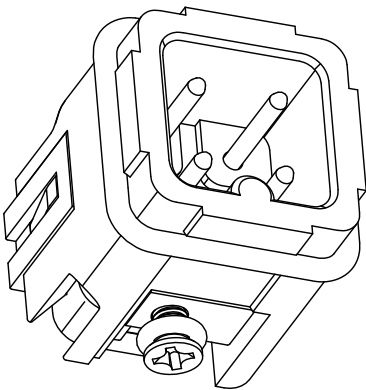

DETACHED LISTS			
PART NO.:	DA003M	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
APPD:		NAME: DA-003-M	
CHKD:			
DRFT:	Mr. Yang 2016.06.16	TITLE: CUSTOMER DRAWING	
		DRAWING NO.: DA-003-M-E01	REV DO-1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SHEET 1/1
		SCALE	2:1