

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



Technical characteristics:

Specifications

DIN EN 60 664-1
DIN EN 61 984


Inserts

- 01. Number of contacts :16+PE
- 02. Rated Current :16A
- 03. Rated Voltage :250V
- 04. Pollution degree :3
- 05. Rated impulse voltage :4kv¹⁰
- 06. Insulation resistance :≥10Ω
- 07. Material:Polycarbonate
- 08. Rated voltage acc.to UL/CSA:600V
- 09. Limiting temperatures : -40℃~+125℃
- 10. Flammability acc. to UL94:V0
- 11. Mechanical working life (mating cycles) : ≥500

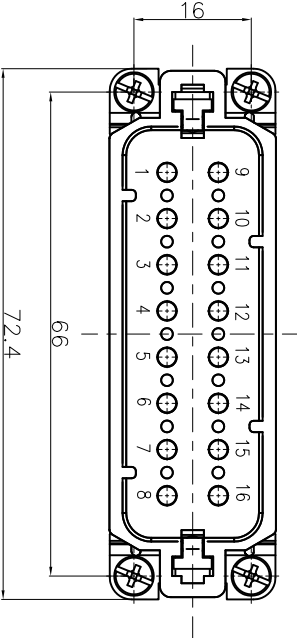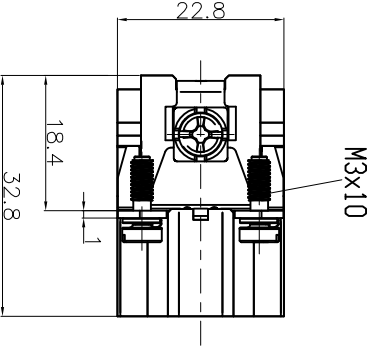

Contacts

- 01. Material:Copper alloy
- 02. Surface:hard-silver plated
- 03. Contact resistance :≤1mΩ
- 04. Terminal :Screw terminal
- 05. Wire gauge :1.0-2.5mm² (AWG 18-14)
- 06. Tightening torque :0.5Nm
- 07. Stripping length :7.5mm
- 08. Rohs Compliance

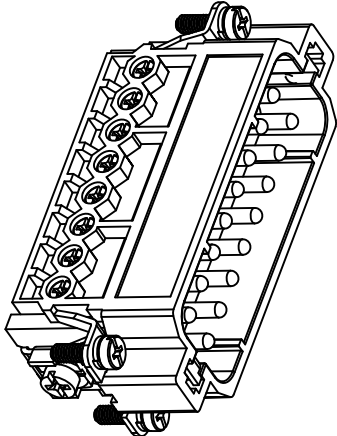

DETACHED LISTS			
PART NO.:	/	NINGBO DEGSON ELECTRICAL CO.,LTD 宁波高松电子有限公司	
APPD:			
CHKD:			
NAME:	DA-016-M		
DRFT:	YONG 2016.07.25	TITLE: CUSTOMER DRAWING	REV DO-1
THIRD ANGLE PROJECTION		DRAWING NO.: DA-016-M	SHEET 1/1
		DO NOT SCALE DRAWING	SCALE 1:1