


# JXB SERIES TERMINAL BLOCK

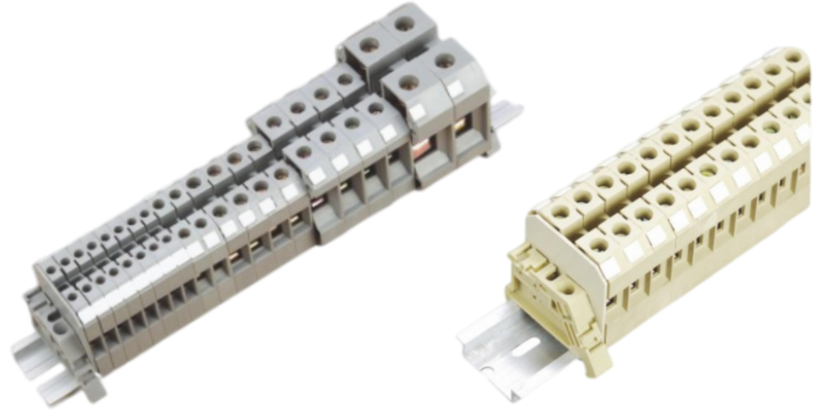

## DESCRIPTION / APPLICATION

JXB series combined terminal blocks mainly use Germany Woodmeler's connection technology. Technology targets conforms to the standard of IEC 60947-1, IEC 60947-7-L. JXB is suitable for guide rail installation.

Small volume, full specification, series JXB's big current terminal use reinforced accessories to install steel pressing-wire frame and wire diversion board technology in order to guarantee the contact reliable.

The stand uses cream-coloured and grey , the connecting-ground pedestal uses yellow and green color with more modern sense.




**End Plate**, Thickness:1.5mm, Color: grey/cream-coloured



**Center connection piece**, 10 position, can be divided into 2, 3 or 4 position.




**Universal terminal fixed part**



**Continuous number marker**

## JXB series combined terminal blocks


JXB2.5/35	Grey	24A	800V	0.2-2.5mm <sup>2</sup>
JXB4/35	Grey	32A	800V	0.2-4mm <sup>2</sup>
JXB6/35	Grey	41A	800V	0.2-6mm <sup>2</sup>
JXB10/35	Grey	57A	800V	0.2-10mm <sup>2</sup>
JXB16/35	Grey	76A	800V	0.5-16mm <sup>2</sup>
JXB25/35	Grey	100A	800V	0.5-25mm <sup>2</sup>
JXB35/35	Grey	125A	800V	10-35mm <sup>2</sup>
JXB70/35	Grey	192A	800V	25-70mm <sup>2</sup>

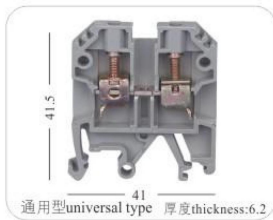

通用型universal type 厚度thickness:6.2

### JXB 2.5/35 Grey

0.2-2.5mm<sup>2</sup>  
 电流current:24A 电压voltage: 800V  
 2.5EN Q2位, 3位, 10位 (2.5Q 2-10)  
 EW35  
 连续印字 (DEK5(1...10))



通用型universal type 厚度thickness:6.2

### JXB 4/35 Grey

0.2-4mm<sup>2</sup>  
 电流current:32A 电压voltage: 800V  
 4EN Q2位, 3位, 10位 (4ENQ 2-10)  
 EW35  
 连续印字 (DEK5(1...10))



通用型universal type 厚度thickness:8

### JXB 6/35 Grey

0.2-6mm<sup>2</sup>  
 电流current:41A 电压voltage: 800V  
 6EN Q2位, 3位, 10位 (6ENQ 2-10)  
 EW35  
 连续印字 (DEK5(1...10))



通用型universal type 厚度thickness:10

### JXB 10/35 Grey


0.2-10mm<sup>2</sup>  
 电流current:57A 电压voltage: 800V  
 10EN Q2位, 3位, 10位 (10ENQ 2-10)  
 EW35  
 连续印字 (DEK5(1...10))



通用型universal type 厚度thickness:12

### JXB 16/35 Grey


0.5-16mm<sup>2</sup>  
 电流current:76A 电压voltage: 800V  
 16EN Q2位, 3位, 10位 (16ENQ 2-10)  
 EW35  
 连续印字 (DEK5(1...10))

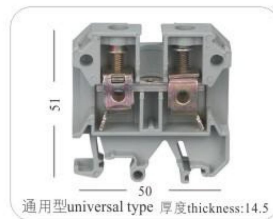

通用型universal type 厚度thickness:14.5

### JXB 25/35 Grey

0.5-16mm<sup>2</sup>  
 电流current:100A 电压voltage: 800V  
 16EN Q2位, 3位, 10位 (16ENQ 2-10)  
 EW35  
 连续印字 (DEK5(1...10))

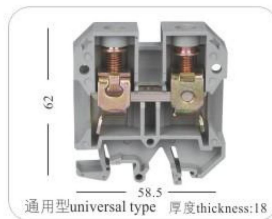

通用型universal type 厚度thickness:18

### JXB 35/35 Grey

10-35mm<sup>2</sup>  
 电流current:125A 电压voltage: 800V  
 35EN Q2位, 3位, 10位 (35ENQ 2-10)  
 EW35  
 连续印字 (DEK5(1...10))



通用型universal type 厚度thickness:22

### JXB 70/35 Grey

25-70mm<sup>2</sup>  
 电流current:192A 电压voltage: 800V  
 70Q 2位, 3位 (70Q 2位, 3位)  
 EW35  
 连续印字 (DEK5(1...10))



### JXB 2.5-35 mm<sup>2</sup>

颜色 Color Green



### JXB 2.5-35 mm<sup>2</sup>

颜色 Color Blue



### JXB 2.5-35 mm<sup>2</sup>


颜色 Color Yellow



### JXB 2.5-35 mm<sup>2</sup>

颜色 Color Red

## JXB series connecting-ground terminal blocks

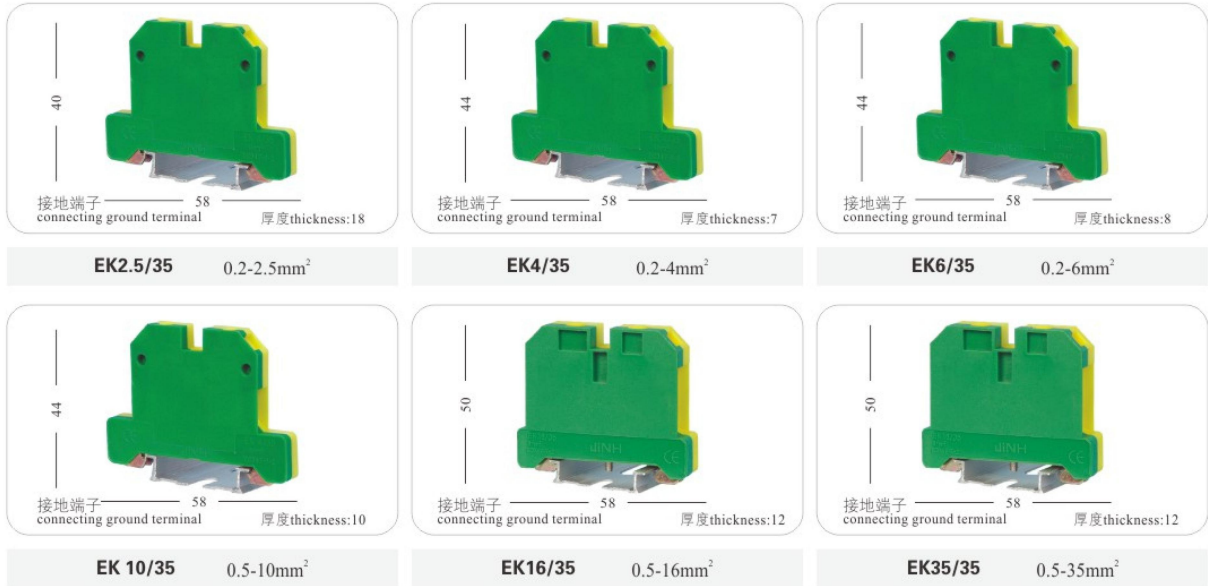

## JXB series terminal accessories

