

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密和与经营活动有关的知识产权外，其他权利均归本公司所有。未经许可，不得复制或传播。 未经授权，不得复制或传播。

FOR-1755 Rev.2.0

2






3

4

5

6

未注公差/General tolerances(mm)													
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2'

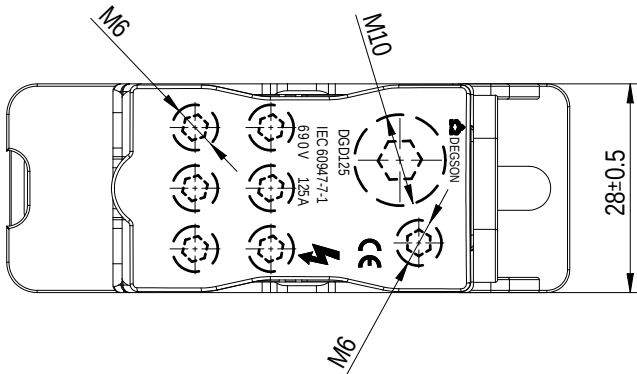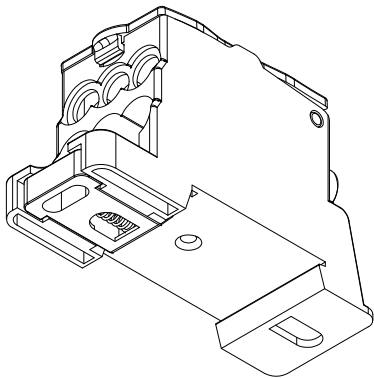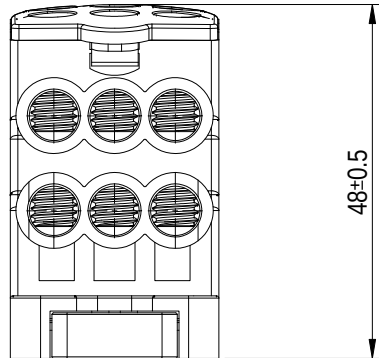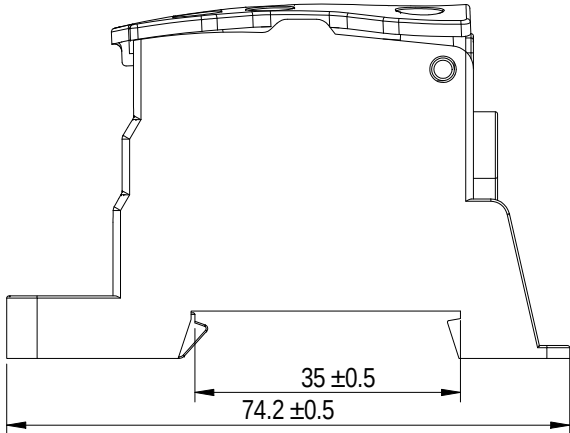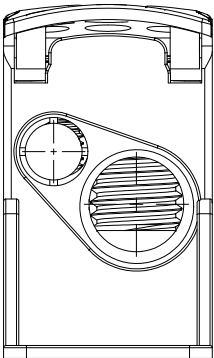

- 技术要求:
- 产品材质: 塑壳/卡脚: 尼龙(PA)
塑盖: 聚碳酸酯(PC)
导电件: H54黄铜(镀镍)
螺丝: A3钢材(镀镍)
弹簧: 碳素钢
 - 额定电压/电流: 690V/125A
 - 耐电压: AC 1分钟3000V无击穿
 - 阻燃性能: 底座 灼热丝960℃, 阻燃(V-0)
塑盖: 灼热丝850℃, 阻燃(V-2)
 - 扭力(N.m): ≤3.0(M6), ≤10(M10)
 - 拉力(N): 2.5mm² ≥50, 4mm² ≥60, 6mm² ≥80, 10mm² ≥90,
16mm² ≥100, 25mm² ≥135, 35mm² ≥190
 - 工作环境温度(℃): -40~+85℃
 - 导线截面(mm²): 进线: (10-35) 出线: (2.5-16)

		MATERIAL:		SURFACE/COLOR:	
APPD: 彭敏		2024.06.05		MAT NO./REV: 30110000047-1 / 01	
CHKD: 高卫国		2024.06.05		MAT STATUS: 批量	
DRFT: 黄仁锦		2024.06.05		NAME	
 A4		 (inch)		DGD125-01P-11-00A(H)	
DRAWING NO.		TYPE		DRAWING STATUS	
200253584		CUSTOMER DRAWING		已发布	
SCALE		SHEET		1/1	
2:1					

00		New Product	黄仁锦	2024.06.05
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6