

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 将本册子内容翻印、复制、销售、出借、分发本册子内容等行为，均视为侵权。本公司保留对涉及专利、实用新型和外观设计的所有权利。

FOR-1755 Rev.2.0

2

3






4

5

6


未注公差/General tolerances (mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

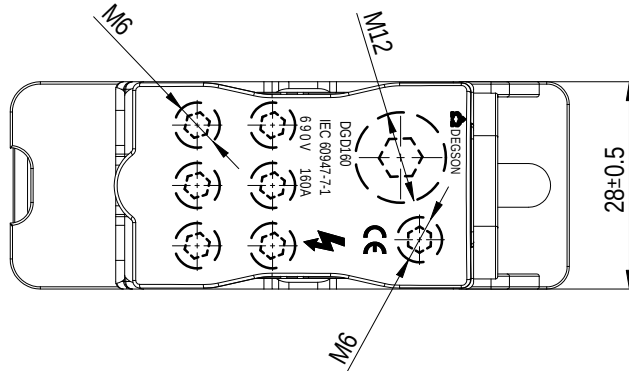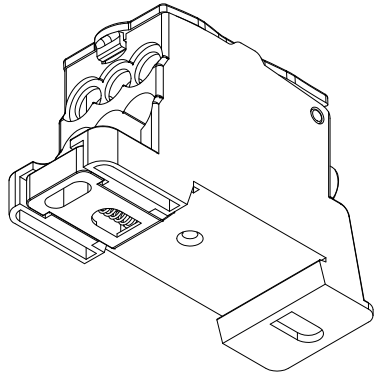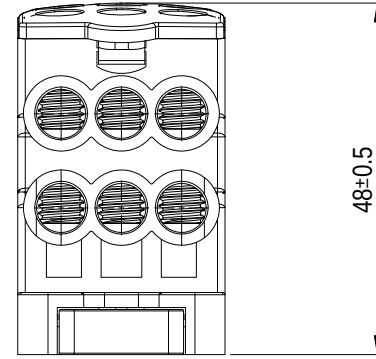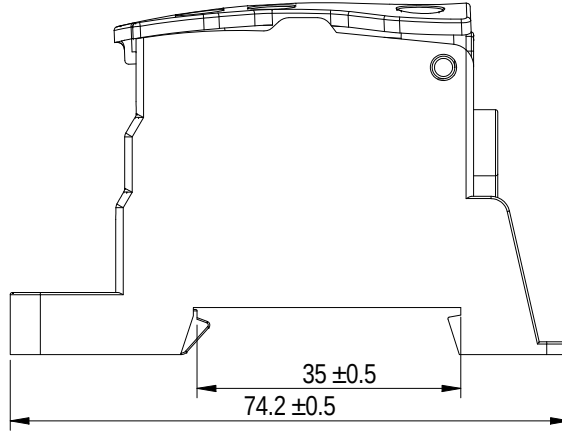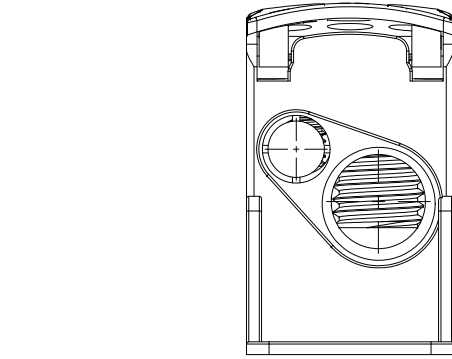

技术要求:

- 产品材质: 塑壳/卡脚: 尼龙(PA)
塑盖: 聚碳酸酯(PC)
导电件: H54黄铜(镀镍)
螺丝: A3钢材(镀镍)
弹簧: 碳素钢
- 额定电压/电流: 690V/160A
- 耐电压: AC 1分钟3000V无击穿
- 阻燃性能: 底座 灼热丝960℃, 阻燃 (V-0)
塑盖: 灼热丝850℃, 阻燃 (V-2)
- 扭力 (N.m): ≤3.0 (M6), ≤12 (M12)
- 拉力 (N): 2.5mm² ≥50, 4mm² ≥60, 6mm² ≥80, 10mm² ≥90, 16mm² ≥100, 25mm² ≥135, 35mm² ≥190, 50mm² ≥236, 70mm² ≥285
- 工作环境温度(℃): -40~+85℃
- 导线截面 (mm²): 进线: (10-70) 出线: (2.5-16)

		MATERIAL:		SURFACE/COLOR:		
		MAT NO./REV: 30110000046-1 / 01		MAT STATUS: 批量		
APPD: 彭敏	2024.06.05	NAME				
CHKD: 高卫国	2024.06.05	DGD160-01P-11-00A (H)				
DRFT: 黄仁锦	2024.06.05	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
		200253586	CUSTOMER DRAWING	已发布	2:1	1/1

00		New Product	黄仁锦	2024.06.05
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6