
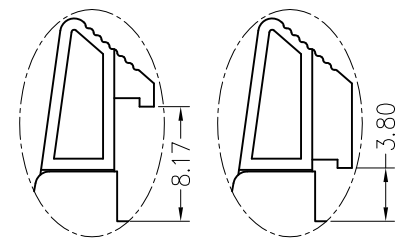
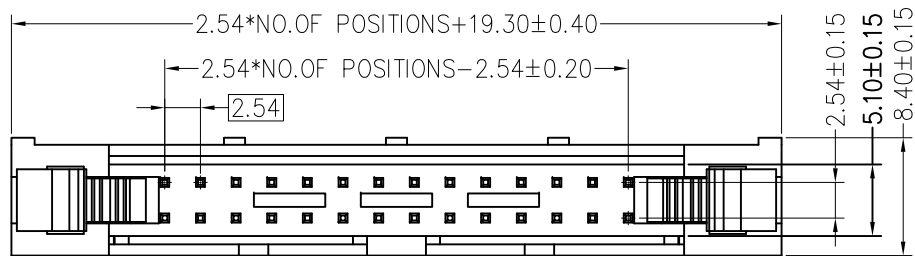


NOTES:

- Voltage Rating:100V,AC/DC
- Current Rating:3.0 AMP,AC/DC
- Dielectric Withstand Voltage:500V,AC/Minute
- Contact Voltage:20 mΩ Max
- Insulation Voltage:1000 mΩ Min
- Operation Temperature:-40°C to +105°C
- Insulator Material:Polyester,UL94 V-0
- Contact Material:Brass
- Contact Plating:Au or Sn Plated on Nickel Overall



Recommended P.C.B Layout
P.C.B Board Tolerance±0.05

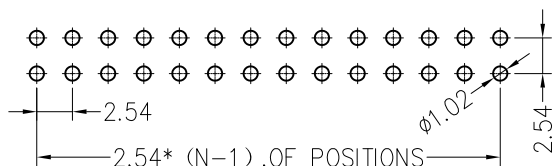

Long Latch EHC16-XXSXXXLN1
Short Latch EHC16-XXSXXXSN1

NEW PART NUMBER

- EH C 16 - XX S XX X X N X 1
- Housing Height: 16=16.6
 - NO.of Pins: 6*64P
 - Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, SN=Tin Plated
 - Color: B=Black, G=Grey
 - Latch Type: L=Long Latch, S=Short Latch, N=Without Latch
 - Packing: 0=PE Bag, A=Tray, T=Tube

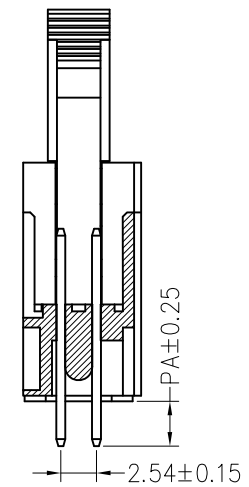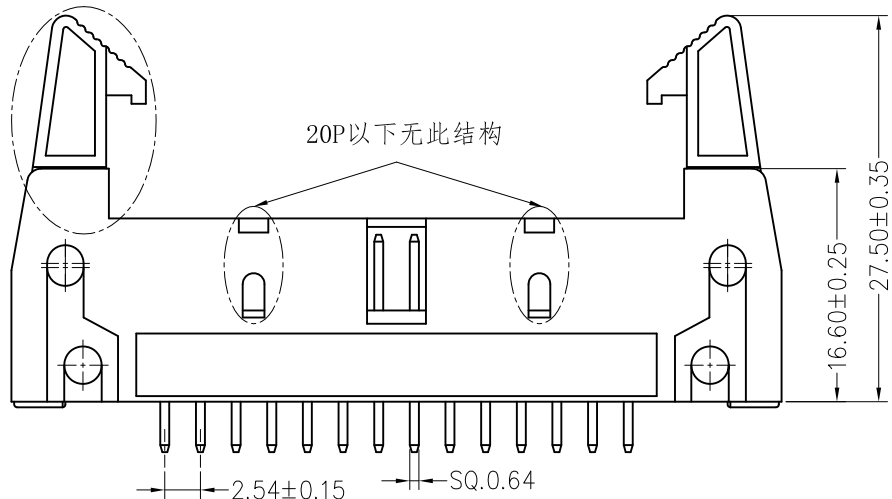

Dimension antitheses list		
item	PA	L
Standard	3.2	---
Alternate	---	---

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	Helen	2011/03/28
				DIM	TOL			
A0	2011/03/28	NEW		X.X	±0.40	DESIGN	Jenny	2011/03/28
				X.XX	±0.25	CHECK	Franck	2011/03/28
				X.XXX	±0.15	APPROVE	Steven	2011/03/28
				Angle	±3°			

LPI 深圳市起德电子科技有限公司
SHEN ZHEN QIDE ELECTRONIC TECHNOLOY CO.,LTD

PART NO.	EHC16-XXSXXXN1	UNIT	mm
TITLE	2.54mm Ejector Header,H=16.6,180°DIP	SCALE	1:1
Customer NO.	---	SHEET	1/1
		PROJ.	