

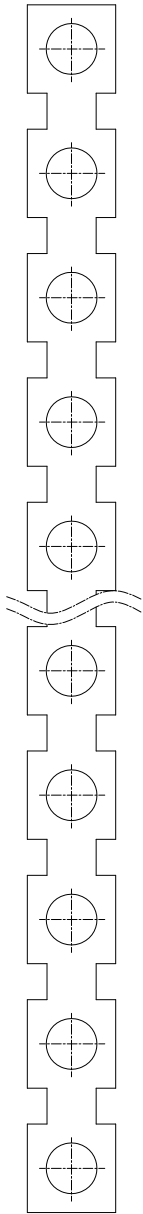



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



FBI XX - 15  
 (Series No.) (Poles) (Pitch)

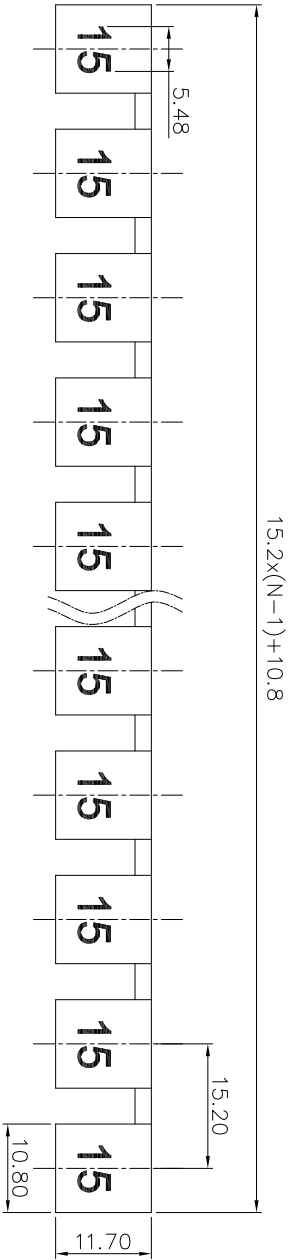

NOTES1:  
 UL Standard  
 1. Torque value : M6 , 22.15Lb.in  
 IEC Standard  
 1. Torque value : M6 , 2.5N.m

NOTES2:  
 1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 15.2mm, Poles : 02~10P  
 3. Undimensioned tolerances:

Current carrier and screws should be packed individually, which must be put in the same box

Pitch range in mm	Nominal dimension range in mm	Over	Over	Over	Over	Over	Over	Over	Over
TO	TO	TO	TO	TO	TO	TO	TO	TO	TO
6	10	24	30	60	100	150	150	150	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	±2°

4. RoHS Compliance

DETACHED LISTS		PART NO.:		NAME:		REV	
APPD:	/	DRFT:	/	NINGBO DEGSON ELECTRICAL CO., LTD	REV	DO	DO
CHKD:	/	TITLE:	CUSTOMER DRAWING	FBIXX-15	SHEET	1/1	1/1
THIRD ANGLE PROJECTION		DRAWING NO.:	/	SCALE	SCALE	1:1	1:1