

1

2

3

4

A

A

B


B

C

C

D

D

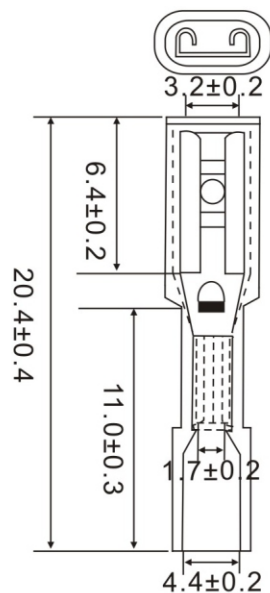

- 适用于软线
- 尺寸单位: mm
- 符合ROHS

- Apply in flexible wire
- DIMENSIONS:mm
- Conform to the ROHS



端子材质:黄铜 TERMINAL BODY:BRASS	厚度:0.3±0.01 THICKNESS
绝缘材质:尼龙 INSULATBODY:NYLON	绝缘护套温度:105°C INSULATION OPEROTING TEMP
绝缘套颜色:红色 INSULATION COLOR:RED	表面处理:镀锡 PLATING:TIN
镀层厚度:2.5um-5um PLATING THICKNESS	镀层耐温:120° /2小时 COATING TEMPERATURE
接线类型:绞合线 STRANDED	最大电流:10A MAX CURRENT



国赛科技发展有限公司  
GUOSAI TECHNOLOGY DEVELOPMENT CO.,LTD.

产品名称: 尼龙全绝缘护套母插端子  
NAME NYLON-FULLY INSULATED FEMALE TERMINAL

客户  
CUSTOMER  
DRAWING

型号: FDFN 1.25-110(5)  
Item NO

审核:  
CHECK

日期:  
DATE

0.5-1.5mm<sup>2</sup>

接插规格:0.5\*2.8  
CONNECTING SPEC

制图:  
DRAW

页数: 1/1  
SHEET

1

2

3

4