

SPECIFICATIONS

Current Rating: 3Amps

Contact Resistance: 20m Ω Max

Insulation Resistance: 1000M Ω Min

Withstanding Voltage: 500V AC for 1 minute

Temperature Range: -40°C to +105°C



Terminal : Brass

Material: PBT, UL94V-0


ORDER INFORMATION

G	L	25	X	1	-	XX	X
Straight Type		Pitch 2.54mm		P.B.T		No. of Contacts	L:Long Ear S:Short Ear N:w/o Ear
G0:Gold Flash	S0:Selective Flash						
G1:Gold 3u"	S1:Selective 3u"						
G2:Gold 5u"	S2:Selective 5u"						
G3:Gold 10u"	S3:Selective 10u"						
G4:Gold 15u"	S4:Selective 15u"						
G5:Gold 30u"	S5:Selective 30u"						

60P & 64P with 3 notches

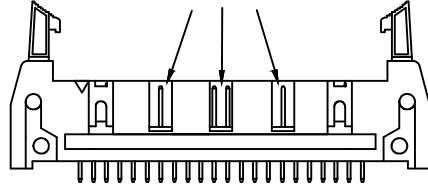




Short Ear



Long Ear



Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

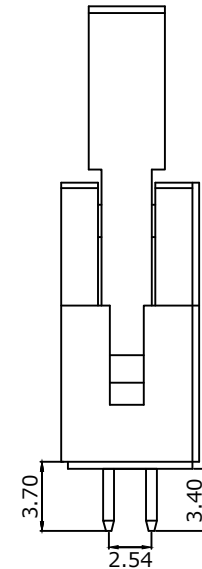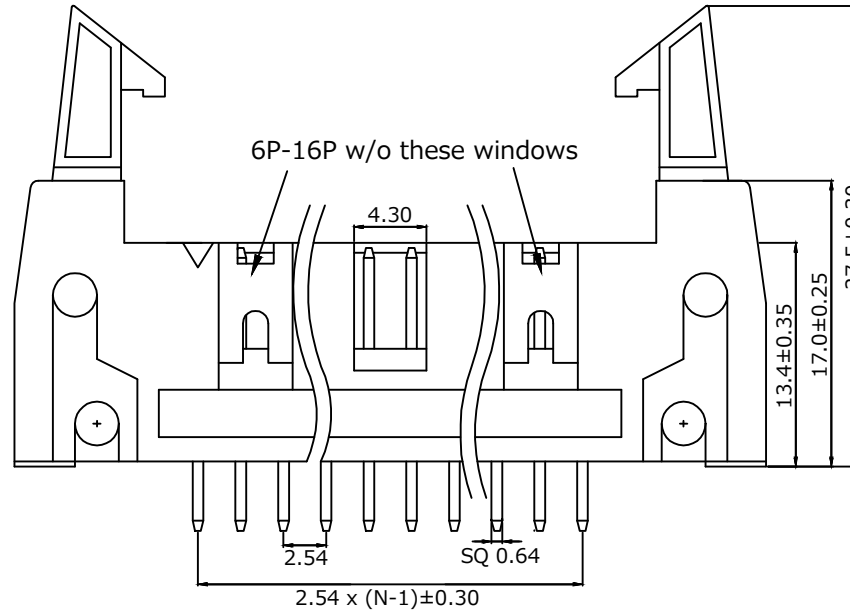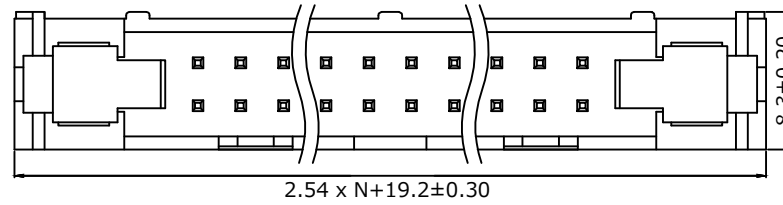

Morecrafts Technology

TEL: +886-2-2966-1326

FAX: +886-2-2966-1352

www.morecrafts.com.tw

PART NO.	GL25X1-XXX	DRAWN	Andrew
DRAWING NO.	GL25X1-XXX	CHECKED	Claudia
DATE	2015/07/24	APPROVED	Brian
TITLE	Ejector Header 2.54mm	REV.	A0
TOLERANCE	.X ± 0.25 .XX ± 0.20	SCALE	1:1
UNIT	mm		