

SPECIFICATIONS

Current Rating: 4A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66, UL94V-0






ORDER INFORMATION

H 2542 - XX

Series No.

No. of Contacts

No. of contacts	Dimensions	
	A	B
2	2.54	5.76
3	5.08	8.30
4	7.62	10.84
5	10.16	13.38
6	12.70	15.92
7	15.24	18.46
8	17.78	21.00
9	20.32	23.54
10	22.86	26.08
11	25.40	28.62
12	27.94	31.16
13	30.48	33.70
14	33.02	36.24
15	35.56	38.78
16	38.10	41.32

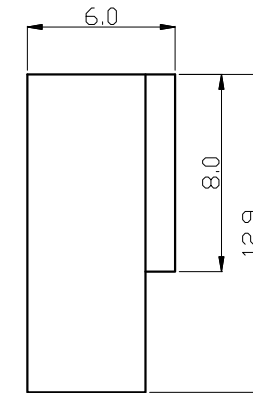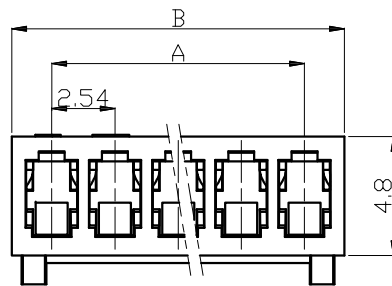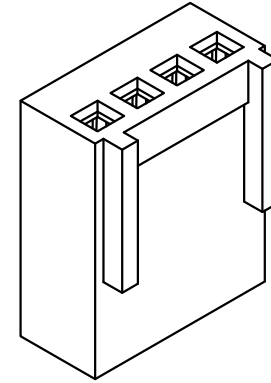

PART NO.	H2542-XX	DRAWN	Andrew
DRAWING NO.	H2542-XX	CHECKED	Claudia
DATE	2019/10/21	APPROVED	Brian

TITLE:	Pitch 2.54mm Housing	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.	DESCRIPTION	DATE
--------	----------------------	------	----	-----------	-----------------------	-------	-----	------	----	-----	-------------	------