


SPECIFICATION
 Poles:2-14
 Voltage rating:AC,DC 250V
 Current rating:AC,DC,7A
 Withstand voltage:1500V
 AC/min.
 Insulation resistance:1000M
 Ω/min.
 Temperature
 range:-25°C~+85°C
 Applicable PC board
 thickness:0.063"(1.6mm)
 Contact resistance:Initial
 value/10mΩ max.
 After environmental
 testing/20mΩ max.

TERMINAL
 Part No. JS3962-T01-01-0171
 Applicable wires:AWG#18-22
 Material:Brass
 Finish:Tin/Plated
 Hardness:H
 Thickness:0.25mm
 Q'ty:6,000pcs/roll

HOUSING
 Part No. JS3962-H01-50-61**
 Poles:2-14
 Material:Nylon 66,UL94V-0
 Q'ty:500,1000 pcs/bag

WAFER
 Part No. JS3962-F01-00-61**
 (180°)
 JS3962-F03-00-61** (90°)
 Poles:2-14
 Material:Post:Brass,Tin/Plated
 Base:Nyoln 66,UL94V-0
 Q'ty:500,1000pcs/bag

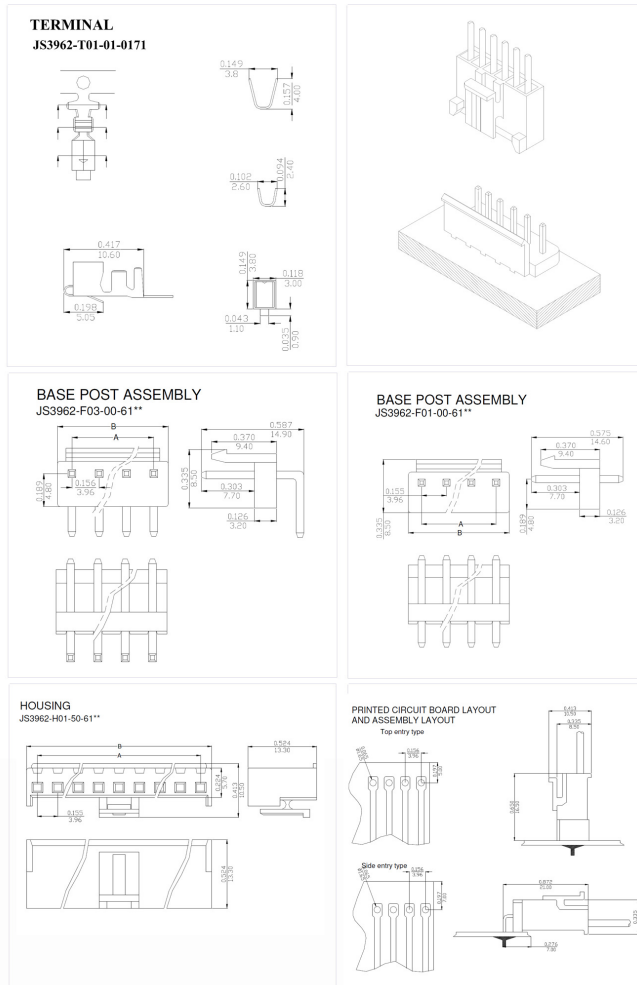

Poles	Part No.		Dimension(mm)		Material
	Top entry type	Side entry type	A	B	
2	JS3962-F01-00-6102	JS3962-F03-00-6102	0.156(3.96)	0.309(7.86)	Post:Brass Copper- undercoated Tin/Plated Base: Nylon 66 UL94V-0 Natural
3	JS3962-F01-00-6103	JS3962-F03-50-8803	0.312(7.92)	0.465(11.82)	
4	JS3962-F01-00-6104	JS3962-F03-50-8804	0.468(11.88)	0.621(15.78)	
5	JS3962-F01-00-6105	JS3962-F03-00-6105	0.624(15.84)	0.777(19.74)	
6	JS3962-F01-00-6106	JS3962-F03-50-8806	0.780(19.80)	0.933(23.70)	
7	JS3962-F01-00-6107	JS3962-F03-50-8807	0.935(23.76)	1.089(27.66)	
8	JS3962-F01-00-6108	JS3962-F03-00-6108	1.091(27.72)	1.245(31.62)	
9	JS3962-F01-00-6109	JS3962-F03-50-8809	1.247(31.68)	1.401(35.58)	
10	JS3962-F01-00-6110	JS3962-F03-50-8810	1.403(35.64)	1.557(39.54)	
11	JS3962-F01-00-6111	JS3962-F03-00-6111	1.559(39.60)	1.712(43.50)	
12	JS3962-F01-00-6112	JS3962-F03-50-8812	1.714(43.56)	1.868(47.46)	
13	JS3962-F01-00-6113	JS3962-F03-50-8813	1.870(47.52)	2.024(51.42)	
14	JS3962-F01-00-6114	JS3962-F03-50-8814	2.026(51.48)	2.180(55.38)	

Poles	Part No.	Dimension(mm)		Material
		A	B	
2	JS3962-H01-50-6102	0.156(3.96)	0.309(7.86)	Nylon 66 UL94V-0 Natural
3	JS3962-H01-50-6103	0.312(7.92)	0.465(11.82)	
4	JS3962-H01-50-6104	0.468(11.88)	0.621(15.78)	
5	JS3962-H01-50-6105	0.624(15.84)	0.777(19.74)	
6	JS3962-H01-50-6106	0.780(19.80)	0.933(23.70)	
7	JS3962-H01-50-6107	0.935(23.76)	1.089(27.66)	
8	JS3962-H01-50-6108	1.091(27.72)	1.245(31.62)	
9	JS3962-H01-50-6109	1.247(31.68)	1.401(35.58)	
10	JS3962-H01-50-6110	1.403(35.64)	1.557(39.54)	
11	JS3962-H01-50-6111	1.559(39.60)	1.712(43.50)	
12	JS3962-H01-50-6112	1.715(43.56)	1.868(47.46)	
13	JS3962-H01-50-6113	1.871(47.52)	2.024(51.42)	
14	JS3962-H01-50-6114	2.027(51.48)	2.180(55.38)	