



Plug type  
 Screw use holder  
 Offer TX/RX (Transmitter / Receiver)  
 16/25/50 Mbps optical transmitting option  
 Application: DVD Player, audio amplifier

DIMENSIONS: in mm

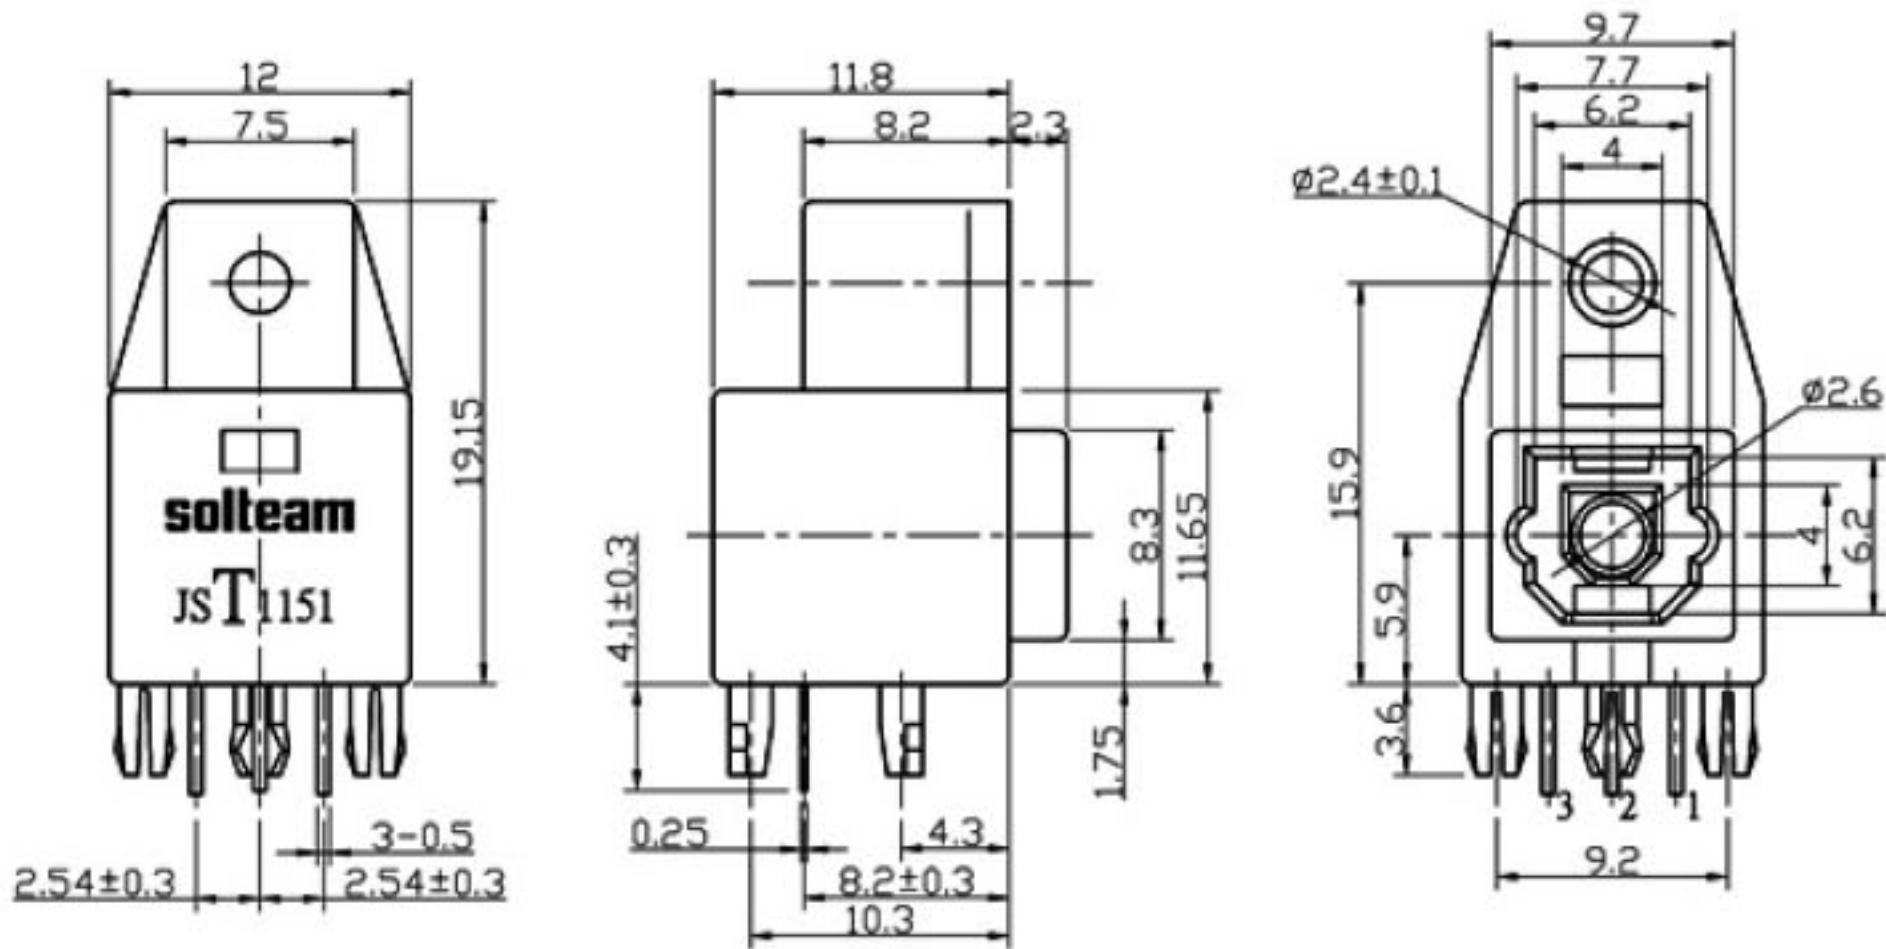

PCB LAYOUT

TX:	RX:
pin 1 Gnd	pin 1 in
pin 2 Vcc	pin 2 Gnd
pin 3 Out	pin 3 Vcc

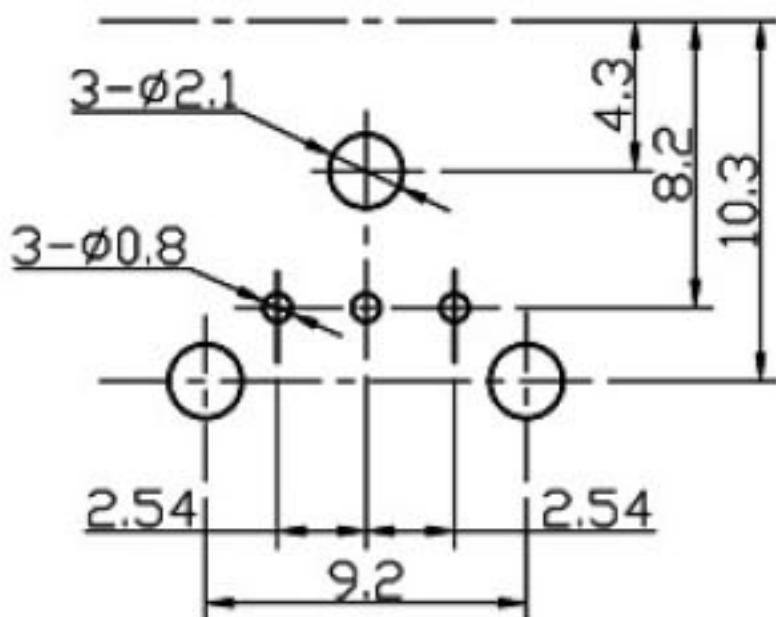

PCB LAYOUT(TOP VIEW)

1. Tolerances ±0.1 mm
2. Substrate Thickness: 1.6 mm