



K1 Terminal	
No.	Pin Name
1	FG
2	VSS
3	VDD
4	V0
5	/WR
6	/RD
7	/CE
8	C/D
9	NC
10	/RST
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	FS1
20	VOUT
21	BLA
22	BLK

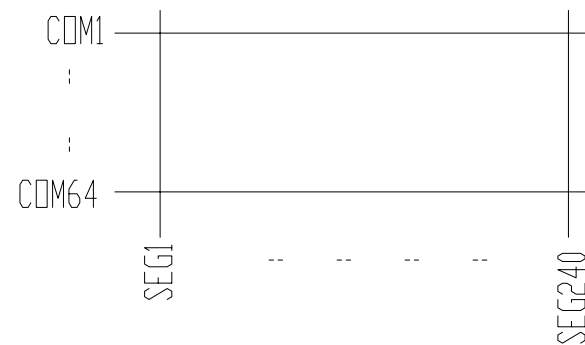

Wiring Details  
Scale=free

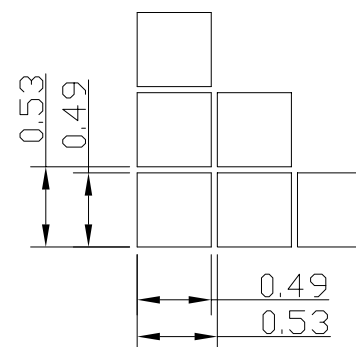

Pixels Details  
Scale=20/1

- Note:
- \*1. Display Type : STN-YG, Positive, Transflective
  - \*2. Viewing Direction : 6H
  - \*3. Duty : 1/64, Bias : 1/9
  - \*4. Operating Voltage : 5.0V
  - \*5. Backlight Color : YG
  - \*6. Backlight Supply : 5.0V TYP.
  - \*7. Operating Temperature : -20°C~70°C
  - \*8. Storage Temperature : -30°C~80°C
  - \*9. An external VR(25K to 50K) must be connected for Contrast Control

C		
B		
A	Typing Correction	Chen Ji 2013-03-28
Rev	Note	Date
Dwg	Title	LM24064FBY Outline Dwg
Dwg No.	MK-003844a-1-1	Date 2011-12-23
Scale	7/5	Tol. ±0.5
Unit	mm	Paper Size A3
Approved	Checked	Drawn Chen Ji

