



DIN Plug



K3161 . K3162 . K31625



K3163 . K3164




CONTACT RESISTANCE : 30mΩ max . (INITIAL)
 INSULATION RESISTANCE : 50MΩ min . AT 250V DC.
 WITHSTANDING VOLTAGE : 250V AC FOR ONE MINUTE.
 INSERTION FORCE : 5.0 KG .
 EXTRACTION FORCE : 4.0 KG .
 LIFE TIME : 5,000 CYCLES min .

K3161 3P ~ 8P DIN PLUG



K316490 7P MINI DIN PLUG

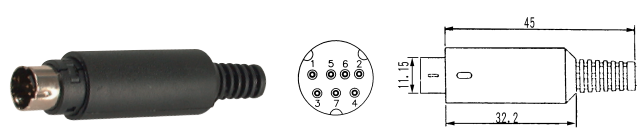

K3162 3P ~ 8P DIN PLUG




K31650 9P MINI DIN PLUG



K31625 3P ~ 8P DIN PLUG RIGHT ANGLE METAL TYPE



K31651 13P DIN PLUG

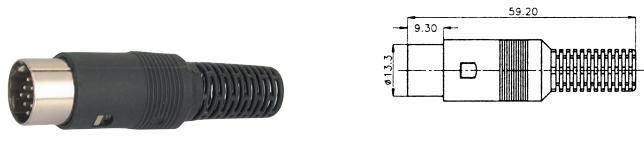

K316420 4P MINI DIN PLUG TEFLON INSULATION SATIN CHROME BARREL




K3167 8P MINI DIN PLUG



K316422 4P MINI DIN PLUG TEFLON INSULATION SATIN SILVER BARREL




K31681 5P PLUG TO 6P MINI DIN JACK

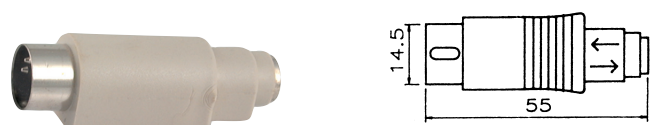

K3163 3P ~ 8P MINI DIN PLUG




K31682 5P JACK TO 6P MINI DIN PLUG

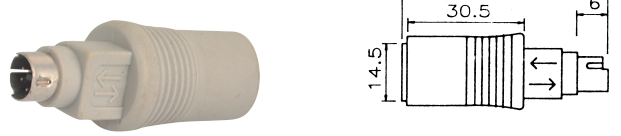

K3164 3P ~ 8P MINI DIN PLUG



K31683 4P MINI JACK TO 4P MINI DIN JACK

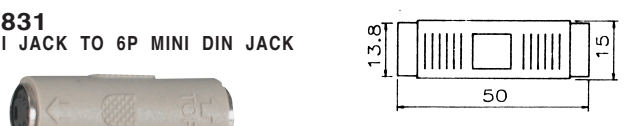

K316831 6P MINI JACK TO 6P MINI DIN JACK

