

特性: Specifications:

电器: electrical:





- 1. 接触阻抗: contact resistance
30milliohms MAX
- 2. 耐电压: Dielectnic Withstanding Voitage:
100 V AC AT Sea Level
- 3. 绝缘阻抗; Lnsulation Resistance:
1000MEGA ohms MIN

材料: Matorial:

- 1. 塑胶: Housing: Hing Temperature Thermoplastics
LCP 耐高温塑胶
- 2. 端子: Contact: Copper Alloy 青铜
- 3. 外壳: Shell: Copper Aiioy 不锈钢
- 4. 卡钩: Shell: Copper Aiioy 不锈钢

电镀: Finish:

- 1. 端子: Contact: piated Goid in Mating Area;
Tin On Solder Talls
接触点镀金, 焊脚点镀锡。
电镀类型: 1U". 3U". 15U". 30U"
- 2. 外壳: Shell:
Nickel piating 镀: 金/镍

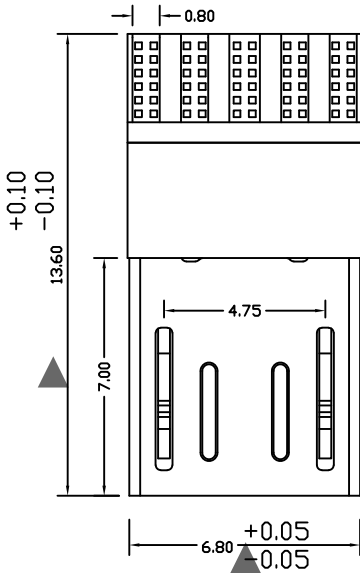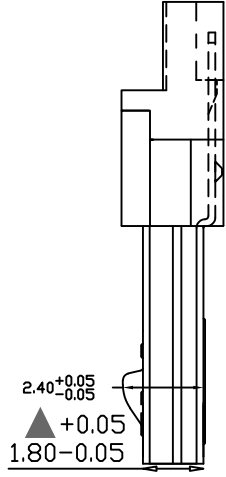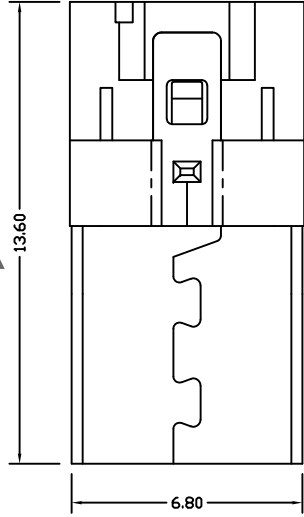

RELEASE LEVEL:
FILE NAME:

0-150	150-500	500-1200
±0.20	±0.3	±0.5

客户:	产品名称: MEICRO 5PIN/前5后5-短				
制图:	日期: 2016-04-18	材质:	料厚:	数量: 1件/套	比例: 1:1
审核:	日期: 2016-04-18	表面处理: 待定	版本: A0	单位: mm	
批准:	日期: 2016-04-18	深圳市创勤科技有限公司 SHENZHEN CHUANGQIN TECHNOLOGY CO., LTD.			