


MKA-50202



- 常开型 1 Form A
- 玻璃长度: 50mm. 直径: 5.4mm

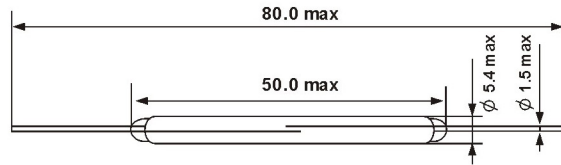

电气特性	Contact Form	触点形式	1A(SPST-NO)
	Contact Material	触点材质	Mo
	Contact Rating	触点负载	250W
	Max. Switching Voltage	最大开关电压	250 VDC / VAC
	Max. Switching Current	最大开关电流	5 A
	Contact Resistance (at initial value)	接触电阻 (初始值)	150 mΩ
	Pull In Value (AT)	启动值	50-100
	Drop Out Value (AT)	释放值	20
工作特性	Operation Time	动作时间	2.0 mSec.(Max.)
	Release Time	释放时间	1.0 mSec.(Max.)
	Breakdown Voltage	耐高压	700VDC
	Contact Capacitance	触点电容	1.0pF
	Insulation Resistance	绝缘电阻	10 ⁹ Ω
	Resonant Frequency	谐振频率	0.7 kHz
	Operation Temperature	工作温度范围	-60℃~+100℃
	Operation Frequency	最高工作频率	5 Hz
	Electrical Life	电气寿命	10 ⁵ (250V, 1A)
	Test Coil	测试线圈	5000 T 335 Ω
Leads	引线脚	Gold-Plated 镀金	

■ Electrical Characteristics:

