

D1RFRD006

7

6

5

4

3




2

1

NOTES:

1. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
2. PITCH: 8.2MM , POLES: N=1P
1. RATED VOLTAGE/CURRENT: UL1059 300V/6.3A  
IEC 500V/6.3A
2. OPERATION TEMPERATURES: -40°C~+105°C
3. WITHSTANDING VOLTAGE: AC3000V/1MIN
4. INSULATION RESISTANCE: 5000M Ω /DC1000V
5. WIRE RANGE: 16~12AWG, 4MM<sup>2</sup>
6. MAX. TORQUE VALUE: M3.0, 5.1KGF.CM
7. UNDIMENSIONED TOLERANCES:

PITCH RANGE IN MM		NOMINAL DIMENSION RANGE IN MM						-
TO	OVER	TO	OVER	TO	OVER	TO	OVER	TO
6	10	10	30	30	60	60	100	100
10	24	30	60	100	150	150	150	150
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	0.05/10

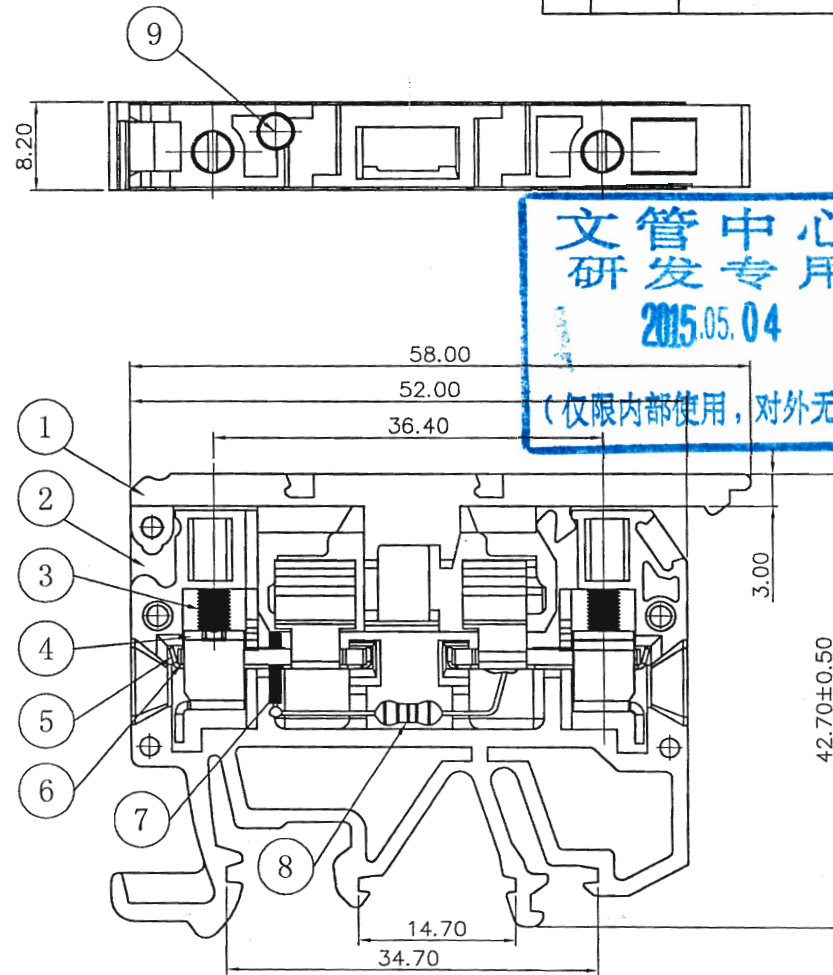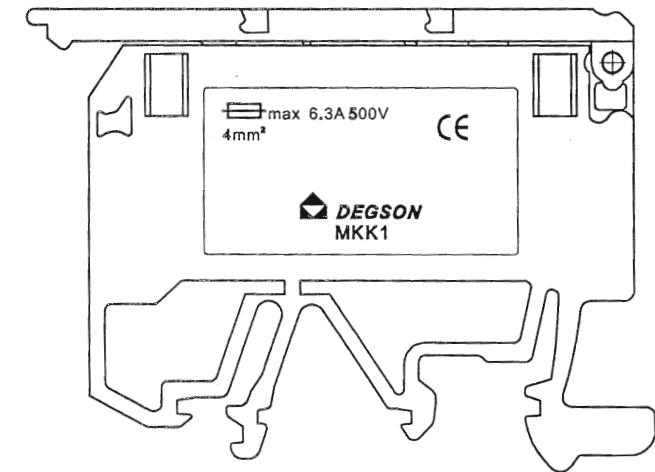

文管中心  
 研发专用  
 2015.05.04  
 (仅限内部使用, 对外无效)

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

2	MKK1-Housing	6087A0Y01A(H)	1	PA66	UL94V-0
1	MKK1-LD-Fuse housing	6087D0Y01C(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES

9	LED red light	F0014	1		
8	RN 1/4W 150K Ω F	F0013	1		
7	Wire saddle	F0015	1		
6	MKK1-Bridge	6087B00020(H)	2	STEEL	Zn plated
5	MKK1-Clamp	6087B00030	2	PHOSPHOR BRONZE	Sn plated
4	MK4Q-Iron bage	X000001770(H)	2	IRON	Zn plated
3	DG10HS"-Screw	S000003000(H)	2	STEEL	Zn plated

DEGSON 宁波高正电子有限公司  
DEGSON ELECTRONICS CO., LTD

NAME: MKK1-LD-01P-1Y-00A(H)

TITL: ASSEMBLY DRAWING

DRAWING NO.: MKK1-LD-E01

APPD: *Arion & huz*

CHKD: *Tea & huz*

DRFT: Apple 05/07/13

DO NOT SCALE DRAWING

SCALE: N/A

SHEET: 1/1

H  
G  
F  
E  
D  
C  
B  
A

G  
F  
E  
D  
C  
B  
A

8

7

6

5

4

3

2

1