


# High Voltage MLC Chips

## For 600V to 5000V Applications

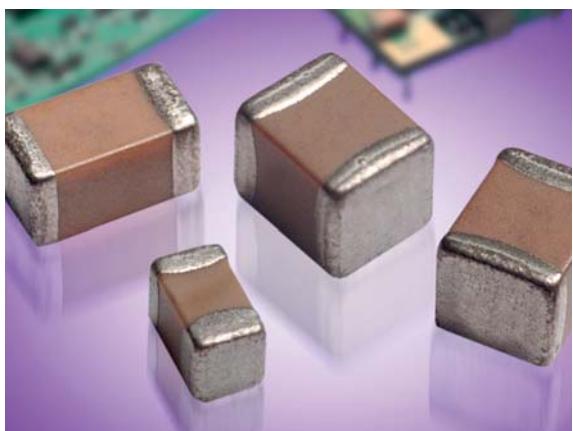

**NEW 630V RANGE**

### HOW TO ORDER


1808	A	A	271	K	A	1	2	A
AVX Style	Voltage	Temperature Coefficient	Capacitance Code	Capacitance Tolerance	Test Level	Termination*	Packaging	Special Code
0805	600V/630V = C	NPO (COG) = A	(2 significant digits + no. of zeros)	COG:J = $\pm 5\%$	A = Standard	1 = Pd/Ag	1 or 2 = 7" Reel**	
1206	1000V = A	NPO (COG) = A		K = $\pm 10\%$		T = Plated	3 or 4 = 13" Reel	A = Standard
1210	1500V = S	X7R = C	Examples:	M = $\pm 20\%$		Ni and Sn		
1808	2000V = G		10 pF = 100	X7R:K = $\pm 10\%$		(RoHS Compliant)		
1812	2500V = W		100 pF = 101	M = $\pm 20\%$				
1825	3000V = H		1,000 pF = 102	Z = $+80\%, -20\%$				
2220	4000V = J		22,000 pF = 223					
2225	5000V = K		220,000 pF = 224					
3640			1 $\mu$ F = 105					
***								

\*Note: Terminations with 5% minimum lead (Pb) is available, see pages 102 and 103 for LD style. Leaded terminations are available, see pages 106-110.

Notes: Capacitors with X7R dielectrics are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations. Contact factory for availability of Termination and Tolerance options for Specific Part Numbers.

\*\* The 3640 Style is not available on 7" Reels.

\*\*\* AVX offers nonstandard chip sizes. Contact factory for details.

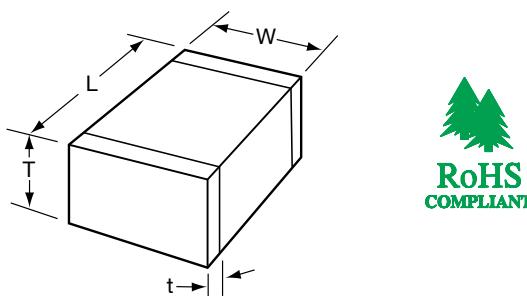

### DIMENSIONS

SIZE	0805	1206	1210*	1808*	1812*	1825*	2220*	2225*	3640*
(L) Length	$2.10 \pm 0.20$ (0.083 $\pm$ 0.008)	$3.30 \pm 0.30$ (0.130 $\pm$ 0.012)	$3.30 \pm 0.40$ (0.130 $\pm$ 0.016)	$4.60 \pm 0.50$ (0.181 $\pm$ 0.020)	$4.60 \pm 0.50$ (0.181 $\pm$ 0.020)	$4.60 \pm 0.50$ (0.181 $\pm$ 0.020)	$5.70 \pm 0.50$ (0.224 $\pm$ 0.020)	$5.70 \pm 0.50$ (0.224 $\pm$ 0.020)	$9.14 \pm 0.25$ (0.360 $\pm$ 0.010)
(W) Width	$1.25 \pm 0.20$ (0.049 $\pm$ 0.008)	$1.60^{+0.30}_{-0.10}$ (0.063 $\pm$ 0.004)	$2.50 \pm 0.30$ (0.098 $\pm$ 0.012)	$2.00 \pm 0.20$ (0.079 $\pm$ 0.008)	$3.20 \pm 0.30$ (0.126 $\pm$ 0.012)	$6.30 \pm 0.40$ (0.248 $\pm$ 0.016)	$5.00 \pm 0.40$ (0.197 $\pm$ 0.016)	$6.30 \pm 0.40$ (0.248 $\pm$ 0.016)	$10.2 \pm 0.25$ (0.400 $\pm$ 0.010)
(T) Thickness Max.	1.35 (0.053)	1.80 (0.071)	2.80 (0.110)	2.20 (0.087)	2.80 (0.110)	3.40 (0.134)	3.40 (0.134)	3.40 (0.134)	2.54 (0.100)
(t) terminal min. max.	$0.50 \pm 0.20$ (0.020 $\pm$ 0.008)	$0.60 \pm 0.20$ (0.024 $\pm$ 0.008)	$0.75 \pm 0.35$ (0.030 $\pm$ 0.014)	$0.75 \pm 0.35$ (0.030 $\pm$ 0.014)	$0.75 \pm 0.35$ (0.030 $\pm$ 0.014)	$0.85 \pm 0.35$ (0.033 $\pm$ 0.014)	$0.85 \pm 0.35$ (0.033 $\pm$ 0.014)	$0.76 (0.030)$ (0.033 $\pm$ 0.014)	$1.52 (0.060)$

\*Reflow Soldering Only

# High Voltage MLC Chips

### **For 600V to 5000V Applications**

## **NP0 (C0G) Dielectric Performance Characteristics**

<b>Capacitance Range</b>	10 pF to 0.100 $\mu$ F (25°C, 1.0 ±0.2 Vrms at 1kHz, for ≤ 1000 pF use 1 MHz)
<b>Capacitance Tolerances</b>	±5%, ±10%, ±20%
<b>Dissipation Factor</b>	0.1% max. (25°C, 1.0 ±0.2 Vrms, 1kHz, for ≤ 1000 pF use 1 MHz)
<b>Operating Temperature Range</b>	-55°C to +125°C
<b>Temperature Characteristic</b>	0 ±30 ppm/°C (0 VDC)
<b>Voltage Ratings</b>	600, 630, 1000, 1500, 2000, 2500, 3000, 4000 & 5000 VDC (+125°C)
<b>Insulation Resistance</b> (+25°C, at 500 VDC)	100K MΩ min. or 1000 MΩ - $\mu$ F min., whichever is less
<b>Insulation Resistance</b> (+125°C, at 500 VDC)	10K MΩ min. or 100 MΩ - $\mu$ F min., whichever is less
<b>Dielectric Strength</b>	Minimum 120% rated voltage for 5 seconds at 50 mA max. current

## NPO (C0G) CAPACITANCE RANGE – PREFERRED SIZES ARE SHADED

Letter	A	C	E	F	G	X	7
<b>Max.</b>	0.813	1.448	1.8034	2.2098	2.794	0.940	3.30
<b>Thickness</b>	(0.032)	(0.057)	(0.071)	(0.087)	(0.110)	(0.037)	(0.130)

NOTE: Contact factory for non-specified capacitance values

# High Voltage MLC Chips

## **For 600V to 5000V Applications**

**NPO (C0G) CAPACITANCE RANGE – PREFERRED SIZES ARE SHADED**

Case Size	1825						2220						2225						3640									
Soldering	Reflow Only						Reflow Only						Reflow Only						Reflow Only									
(L) Length mm (in.)																												
(W) Width mm (in.)																												
(T) Thickness mm (in.)																												
(t) Terminal min max																												
Voltage (V)	600	630	1000	1500	2000	2500	3000	4000	600	630	1000	1500	2000	2500	3000	4000	5000	600	630	1000	1500	2000	2500	3000	4000	5000		
Cap (pF)	1.5	1R5																										
	1.8	1R8																										
	2.2	2R2																										
	2.7	2R7																										
	3.3	3R3																										
	3.9	3R9																										
	4.7	4R7																										
	5.6	5R6																										
	6.8	6R8																										
	8.2	8R2																										
10 100	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F					
12 120	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F					
15 150	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F					
18 180	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F					
22 220	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F					
27 270	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F					
33 330	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F					
39 390	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F					
47 470	E	E	E	E	E	E	E	F	E	E	E	E	E	E	E	E	E	E	E	E	E	F	G					
56 560	E	E	E	E	E	E	F	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	G					
68 680	E	E	E	E	E	E	F	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	G					
82 820	E	E	E	E	E	E	F	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	G					
100 101	E	E	E	E	E	E	F	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G					
120 121	E	E	E	E	E	E	F	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G					
150 151	E	E	E	E	E	E	F	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G					
180 181	E	E	E	E	E	E	F	E	E	E	E	E	F	F	E	E	E	E	E	E	E	G	G					
220 221	E	E	E	E	E	E	F	E	E	E	E	E	F	F	E	E	E	E	E	E	E	G	G					
270 271	E	E	E	E	E	F	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G					
330 331	E	E	E	E	E	F	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G					
390 391	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G					
470 471	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G					
560 561	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G					
680 681	E	E	E	E	F	F	E	E	E	E	E	F	F	E	E	E	E	E	E	E	E	G	G					
750 751	E	E	E	E	E	F	F	E	E	E	E	F	F	E	E	E	E	E	E	E	E	G	G					
820 821	E	E	E	E	E	F	F	E	E	E	E	E	F	F	E	E	E	E	E	E	E	G	G					
1000 102	E	E	E	E	F	F	E	E	E	E	E	F	F	E	E	E	E	E	E	E	E	G	G					
1200 122	E	E	E	E	E	G	G	E	E	E	E	E	G	G	E	E	E	E	E	E	E	G	G					
1500 152	E	E	E	F	F	G	G	E	E	E	F	F	G	G	E	E	E	E	F	F	G	G	G					
1800 182	E	E	E	F	F	G	G	E	E	E	F	F	G	G	E	E	E	E	G	G	G	G	G					
2200 222	E	E	E	G	G	G	G	E	E	E	G	G	G	G	E	E	E	E	E	E	E	G	G					
2700 272	E	E	E	G	G	G	G	E	E	E	G	G	G	G	E	E	E	F	F	F	F	G	G					
3300 332	E	E	E	G	G	G	G	E	E	E	G	G	G	G	E	E	E	F	F	F	F	G	G					
3900 392	E	E	E	G	G	G	G	E	E	E	G	G	G	G	E	E	E	G	G	G	G	G	G					
4700 472	E	E	E	G	G	G	G	E	E	E	G	G	G	G	F	F	F	G	G	G	G	G	G					
5600 562	F	F	F	G	G	G	G	F	F	F	G	G	G	G	F	F	F	G	G	G	G	G	G					
6800 682	F	F	F					F	F	F					F	F	F	G	G	G	G	G	G	G				
8200 822	G	G	G					G	G	G					G	G	G					G	G	G	G			
Cap (μF)	0.010	103	F	F	G			7	7	7					G	G	G					G	G	G	G			
	0.012	123														G	G											
	0.015	153														G	G											
	0.018	183														G	G											
	0.022	223														G	G											
	0.033	333														G	G											
	0.047	473														G	G											
	0.056	563														G	G											
	0.068	683														G	G											
	0.100	104																										
Voltage (V)	600	630	1000	1500	2000	2500	3000	4000	600	630	1000	1500	2000	2500	3000	4000	5000	600	630	1000	1500	2000	2500	3000	4000	5000		
Case Size	1825						2220						2225						3640									

NOTE: Contact factory for non-specified capacitance values

Letter	A	C	E	F	G	X	7
Max. Thickness	0.813 (0.032)	1.448 (0.057)	1.8034 (0.071)	2.2098 (0.087)	2.794 (0.110)	0.940 (0.037)	3.30 (0.130)

# High Voltage MLC Chips

### **For 600V to 5000V Applications**

## X7R Dielectric

## Performance Characteristics

<b>Capacitance Range</b>	10 pF to 0.82 µF (25°C, 1.0 ±0.2 Vrms at 1kHz)
<b>Capacitance Tolerances</b>	±10%; ±20%; +80%, -20%
<b>Dissipation Factor</b>	2.5% max. (25°C, 1.0 ±0.2 Vrms, 1kHz)
<b>Operating Temperature Range</b>	-55°C to +125°C
<b>Temperature Characteristic</b>	±15% (0 VDC)
<b>Voltage Ratings</b>	600, 630, 1000, 1500, 2000, 2500, 3000, 4000 & 5000 VDC (+125°C)
<b>Insulation Resistance</b> (+25°C, at 500 VDC)	100K MΩ min. or 1000 MΩ - µF min., whichever is less
<b>Insulation Resistance</b> (+125°C, at 500 VDC)	10K MΩ min. or 100 MΩ - µF min., whichever is less
<b>Dielectric Strength</b>	Minimum 120% rated voltage for 5 seconds at 50 mA max. current

## X7R CAPACITANCE RANGE – PREFERRED SIZES ARE SHADED

Case Size	0805			1206				1210				1808						1812											
Soldering	Reflow/Wave			Reflow/Wave				Reflow Only				Reflow Only						Reflow Only											
(L) Length (in.)	mm mm	2.10 ± 0.20 (0.085 ± 0.008)			3.30 ± 0.30 (0.130 ± 0.012)				3.30 ± 0.40 (0.130 ± 0.016)				4.60 ± 0.50 (0.181 ± 0.020)						4.60 ± 0.50 (0.177 ± 0.012)										
(W) Width (in.)	mm mm	1.25 ± 0.20 (0.049 ± 0.008)			1.60 ± 0.30/-0.10 (0.063 ± 0.012/-0.004)				2.50 ± 0.30 (0.098 ± 0.012)				2.00 ± 0.20 (0.079 ± 0.008)						3.20 ± 0.30 (0.126 ± 0.008)										
(T) Thickness (in.)	mm mm	1.35 (0.053)			1.80 (0.071)				2.80 (0.110)				2.20 (0.087)						2.80 (0.100)										
(t) Terminal min max	mm mm	0.50 ± 0.20 (0.020 ± 0.008)			0.60 ± 0.20 (0.024 ± 0.008)				0.75 ± 0.35 (0.030 ± 0.014)				0.75 ± 0.35 (0.030 ± 0.014)						0.75 ± 0.35 (0.030 ± 0.014)										
Voltage (V)	600	630	1000	600	630	1000	1500	2000	600	630	1000	1500	2000	600	630	1000	1500	2000	2500	3000	4000	600	630	1000	1500	2000	2500	3000	4000
Cap (pF)	100	101	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
	120	121	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
	150	151	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
	180	181	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
	220	221	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
	270	271	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
	330	331	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	E	E	E	E	E		
	390	391	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	E	E	E	E	E		
	470	471	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	E	E	E	E	E		
	560	561	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	E	E		
	680	681	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	E	F		
	750	751	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	E	F		
	820	821	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	E	F		
	1000	102	X	X	X	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	E	F		
	1200	122	X	X	X	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	E	F		
	1500	152	X	X	X	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	E	G		
	1800	182	X	X	X	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	E	G		
	2200	222	X	X	X	C	C	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	E	G			
	2700	272	C	C	C	C	E	E		E	E	E	F	E	E	E	E	E	E	F	F	E	E	E	E	G	G		
	3300	332	C	C	C	C	E		E	E	E	F	E	E	E	E	E	E	F	F	E	E	E	F	F	G	G		
	3900	392	C	C	C	C	E		E	E	E	F		E	E	E	F		E	E	F	F	E	E	E	F	F	G	
	4700	472	C	C	C	C	E	E	F	E	E	E	F	E	E	E	F	E	E	F	F	E	E	E	F	F	G		
	5600	562	C	C	C	C	E	E	F	E	E	E	F	E	E	E	F	E	E	E	F	E	E	E	G	G	G		
	6800	682	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	G	G	G		
	8200	822	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	G	G	G	
Cap (μF)	0.010	103	C	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	F	G	G	G		
	0.015	153	C	C	E	E	E	E		E	E	E	E	F	F	F	F	F	F	F	F	E	E	F	G	G	G		
	0.018	183	C	C	E	E	E	E		E	E	E	E	F	F	F	F	F	F	F	F	E	E	G					
	0.022	223	C	C	E	E	E	E		E	E	E	F		F	F	F	F	F	F	F	E	E	G					
	0.027	273			E	E				E	E					F	F					E	E	G					
	0.033	333			E	E				E	E					F	F					E	E	G					
	0.039	393								E	E					F	F					E	E	G					
	0.047	473								E	E					F	F					E	E	G					
	0.056	563														F	F					F	F						
	0.068	683														F	F					F	F						
	0.082	823														F	F					F	F						
	0.100	104														F	F					F	F						
	0.150	154																				G	G						
	0.220	224																				G	G						
	0.270	274																											
	0.330	334																											
	0.390	394																											
	0.470	474																											
	0.560	564																											
	0.680	684																											
	0.820	824																											
	1.000	105																											
Voltage (V)	600	630	1000	600	630	1000	1500	2000	600	630	1000	1500	2000	600	630	1000	1500	2000	2500	3000	4000	600	630	1000	1500	2000	2500	3000	4000
Case Size	0805			1206				1210				1808						1812											

Letter	A	C	E	F	G	X	7
<b>Max.</b>	0.813	1.448	1.8034	2.2098	2.794	0.940	3.30
<b>Thickness</b>	(0.032)	(0.057)	(0.071)	(0.087)	(0.110)	(0.037)	(0.130)

NOTE: Contact factory for non-specified capacitance values

# High Voltage MLC Chips

For 600V to 5000V Applications

**X7R CAPACITANCE RANGE  
PREFERRED SIZES ARE SHADED**

Case Size	1825								2220								2225								3640																			
Soldering	Reflow Only								Reflow Only								Reflow Only								Reflow Only																			
(L) Length mm (in.)	4.60 ± 0.50 (0.181 ± 0.020)								5.70 ± 0.50 (0.224 ± 0.020)							5.70 ± 0.50 (0.225 ± 0.010)								9.14 ± 0.25 (0.360 ± 0.010)																				
(W) Width mm (in.)	6.30 ± 0.40 (0.248 ± 0.016)								5.00 ± 0.40 (0.197 ± 0.016)							6.30 ± 0.40 (0.250 ± 0.010)								10.2 ± 0.25 (0.400 ± 0.010)																				
(T) Thickness mm (in.)	3.40 (0.134)								3.40 (0.134)							3.40 (0.100)								2.54 (0.100)																				
(t) Terminal min max	0.75 ± 0.35 (0.030 ± 0.014)								0.85 ± 0.35 (0.033 ± 0.014)							0.85 ± 0.35 (0.033 ± 0.014)								0.76 (0.030)				1.52 (0.060)																
Voltage (V)	600	630	1000	1500	2000	2500	3000	4000	600	630	1000	1500	2000	2500	3000	4000	5000	600	630	1000	1500	2000	2500	3000	4000	5000	600	630	1000	1500	2000	2500	3000	4000	5000									
Cap (pF)	100	101																																										
	120	121																																										
	150	151																																										
	180	181																																										
	220	221																																										
	270	271																																										
	330	331																																										
	390	391																																										
	470	471																																										
	560	561																																										
	680	681																																										
	750	751																																										
	820	821																																										
	1000	102	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	F	F	F	F	F		G	G	G	G	G	G	G	G	G	G	G								
	1200	122	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	F	F	F	F	F		G	G	G	G	G	G	G	G	G	G	G								
	1500	152	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	F	F	F	F	F		G	G	G	G	G	G	G	G	G	G	G								
	1800	182	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	F	F	F	F	F		G	G	G	G	G	G	G	G	G	G	G								
	2200	222	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	F	F	F	F	F		G	G	G	G	G	G	G	G	G	G	G								
	2700	272	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	F	F	F	F	F		G	G	G	G	G	G	G	G	G	G	G								
	3300	332	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	F	F	F	F	F		G	G	G	G	G	G	G	G	G	G	G								
	3900	392	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	F	F	F	F	F		G	G	G	G	G	G	G	G	G	G	G								
	4700	472	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	F	F	F	F	F		G	G	G	G	G	G	G	G	G	G	G								
	5600	562	F	F	F	F	F	F	F	F	F	F	F	F	G		F	F	F	F	F	F	F	F		G	G	G	G	G	G	G	G	G	G	G								
	6800	682	F	F	F	G	G	G	G		F	F	F	F	G		F	F	F	F	G	G		F		G	G	G	G	G	G	G	G	G	G									
	8200	822	F	F	F	G	G	G	G		F	F	F	G	G		F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G									
Cap (μF)	0.010	103	F	F	F	G	G	G	G		F	F	F	G	G		F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G									
	0.015	153	F	F	F	G	G	G	G		F	F	F	G	G		F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G									
	0.018	183	F	F	F	G	G	G	G		F	F	F	G	G		F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G									
	0.022	223	F	F	F	G	G	G	G		F	F	F	G	G		F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G									
	0.027	273	F	F	F	G	G	G	G		F	F	F	G	G		F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G									
	0.033	333	F	F	F	G	G	G	G		F	F	F	G	G		F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G									
	0.039	393	F	F	F	G	G	G	G		F	F	F	G	G		F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G									
	0.047	473	F	F	F	P	P	P	P		F	F	F	G	G		F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G									
	0.056	563	F	F	F	G	G	G	G		F	F	F	G	G		F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G									
	0.068	683	F	F	G						F	F	G				F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G	G								
	0.082	823	F	F	G						F	F	G				F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G	G								
	0.100	104	F	F	G						F	F	G				F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G	G								
	0.150	154	F	F							F	F	G				F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G	G								
	0.220	224	F	F							F	F	G				F	F	F	G	G	G		F		G	G	G	G	G	G	G	G	G	G	G								
	0.270	274	F	F							F	F					F	F	F					F																				
	0.330	334	F	F							F	F					F	F	F					F																				
	0.390	394	F	F							F	F					F	F	F					F																				
	0.470	474	F	F							F	F					F	F	F					F																				
	0.560	564	G	G							G	G					F	F	F					F																				
	0.680	684									G	G					G	G					G																					
	0.820	824									G	G					G	G					G																					
	1.000	105																																										
Voltage (V)	600	630	1000	1500	2000	2500	3000	4000	600	630	1000	1500	2000	2500	3000	4000	5000	600	630	1000	150																							