

PIN HEADER 90° DIP TYPE (1.27MM PITCH)





MATERIAL

- *Insulator : Polyester (UL94V-0)
- *Contact Pin : Brass
- *Contact Plated : Gold over Nickel or Tin
- *Color : Black

SPECIFICATION

- *Current Rate : 1A
- *Operation Temperature : - 40°C to + 105°C
- *Dielectric Withstanding : AC 500V
- *Voltage : AC 250V
- *Insulation Resistance : 5000MΩ Min.

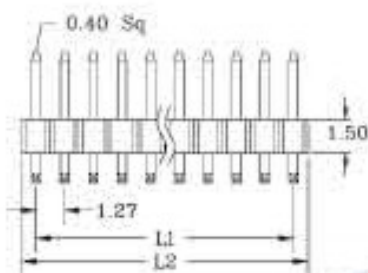

Recommended
P.C Board
Hole Layout

Recommended
P.C Board
Hole Layout

DIMENSION	
L1	1.27mm (0.05") x (POSITION NO. - 1)
L2	1.27mm (0.05") x POSITION NO.
M	Mating Length
T	Tail Length
R	Right Angle Length

UNIT : mm

Ordering Information STANDARD DIMENSION : SHOW P/N END TO CODE #7
SPECIAL DIMENSION : KEEP SHOWING CODE #8-#12 (PS.標準碼為7碼,8-12視需要加註於標準碼後)

PH	S	R	30	G	4	0	/	**	/	**	/	**	-	**	-	5V
1	2	3	4	5	6	7		8		9		10		11		12

1.SERIES NO (產品系列)

PH = PIN HEADER (排針)

2.ROW TYPE (排別)

S = SINGLE ROW (單排)

D = DOUBLE ROW (雙排)

3.TERMINAL TYPE (端子類別)

R = RIGHT ANGLE TYPE (90°)

L = LOW PROFILE TYPE (90°)

4.NO. OF PIN (端子數)

03 TO 32 (SINGLE ROW 單排)

06 TO 100 (DOUBLE ROW 雙排)

5.CONTACT PLATED (端子電鍍)

T = ALL TIN PLATED (全鍍錫)

G = ALL GOLD PLATED (全鍍金)

H = TIN PLATED ON TERMINAL
& GOLD PLATED ON CONTACT
(鍍半金鍍)

6.PITCH - PIN TO PIN (端子距離)

4 = 1.27MM

7.PITCH - ROW TO ROW (排距)

0 = SINGLE ROW ONLY (單排適用)

3 = 1.27MM DIP

8.SPECIAL MATING (特殊上針長度)

STANDARD : 3.0 MM

9.SPECIAL TAIL (特殊下針長度)

STANDARD : 2.8 MM

10.SPECIAL RIGHT ANGLE (特殊彎角高度)

STANDARD : 1.0 MM

11.SPECIAL PLASTIC HEIGHT (特殊塑膠高度)

STANDARD : 1.5 MM

12.PULL OUT PIN (拔PIN)

* V = NO. OF PIN