


RHA 5W-50W产品外型及尺寸

| 规格 型号 TYPE | 25℃下额定 功率(W) (带散热板) | 尺寸 DIMENSION (mm) | | | | | | | | | | | 标准散热板(铝) | |
|------------------|---------------------------|-------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|---------------------------|------------|
| | | 电阻体 | | | | | | | | | | | 表面积 (cm ²) | 厚度 (mm) |
| | | A ±1.0 | B ±1.0 | L ±2.0 | H ±1.0 | C ±1.0 | E ±1.0 | F ±1.0 | M ±0.5 | N ±0.5 | d1 ±0.5 | d2 ±0.5 | | |
| RHA | 5W | 15.5 | 16 | 36.5 | 8 | 8.5 | 11.4 | 12 | 4.4 | 1.5 | 1.5 | 2.2 | 415 | 1 |
| | 10W | 19.5 | 21 | 40.5 | 10 | 11.2 | 14 | 16 | 5 | 2 | 2 | 2.5 | 415 | |
| | 20W | 27 | 27 | 48 | 13 | 14.3 | 18.3 | 20 | 7 | 2 | 2 | 3.5 | 535 | |
| | 25W | 27 | 27 | 48 | 13 | 14.3 | 18.3 | 20 | 7 | 2 | 2 | 3.5 | 535 | |
| | 30W | 34 | 29 | 55 | 15.5 | 16.3 | 25 | 22 | 7.3 | 2 | 2 | 3.5 | 535 | |
| | 50W | 50 | 29 | 71 | 15.5 | 16.3 | 40 | 22 | 7.3 | 2 | 2 | 3.5 | 995 | |

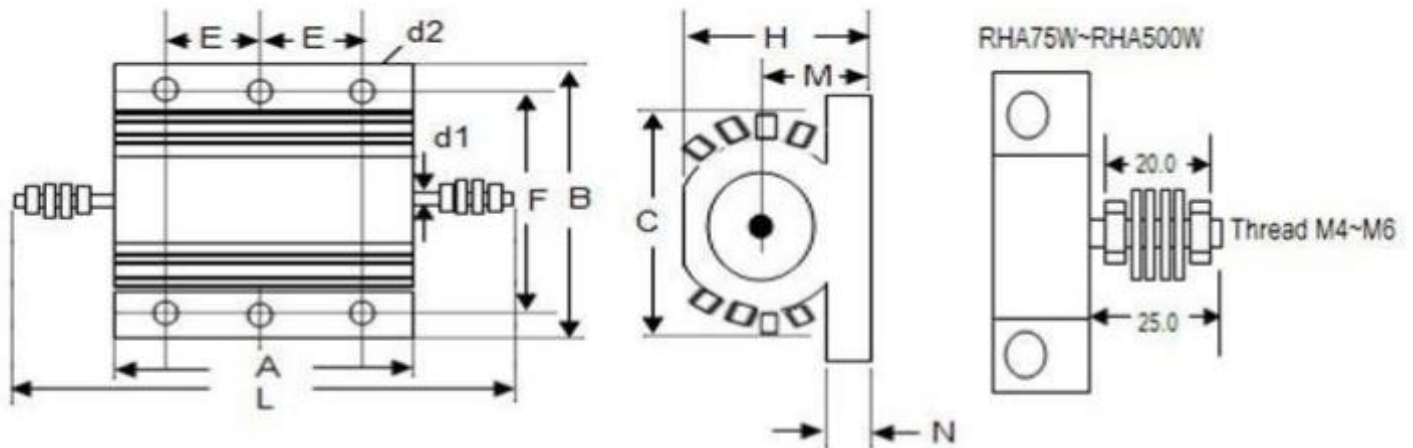

RHA 75W-500W产品外型及尺寸

| 规格 型号 TYPE | 25℃下额定 功率(W) (带散热板) | 尺寸 DIMENSION (mm) | | | | | | | | | | | 标准散热板(铝) | |
|------------------|---------------------------|-------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|---------------------------|------------|
| | | 电阻体 | | | | | | | | | | | 表面积 (cm ²) | 厚度 (mm) |
| | | A ±1.0 | B ±1.0 | L ±2.0 | H ±1.0 | C ±1.0 | E ±1.0 | F ±1.0 | M ±0.5 | N ±0.5 | d1 ±0.5 | d2 ±0.5 | | |
| RHA | 75W | 65.5 | 48 | 93.5 | 26 | 27 | 23.5 | 37 | 11.5 | 3.5 | M4 | 4.4 | 995 | 3 |
| | 100W | 98 | 48 | 126 | 26 | 27 | 35 | 37 | 11.5 | 3.5 | M4 | 4.4 | 995 | |
| | 150W | 130 | 48 | 158 | 26 | 27 | 52 | 37 | 11.5 | 3.5 | M4 | 4.4 | 995 | |
| | 200W | 92 | 73 | 132 | 45 | 46.5 | 35 | 58 | 21 | 5 | M6 | 5.5 | 3750 | |
| | 250W | 112 | 73 | 152 | 45 | 46.5 | 45 | 58 | 21 | 5 | M6 | 5.5 | 4765 | |
| | 300W | 130 | 73 | 170 | 45 | 46.5 | 51 | 58 | 21 | 5 | M6 | 5.5 | 5780 | |
| | 500W | 204 | 73 | 244 | 45 | 46.5 | 87 | 58 | 21 | 5 | M6 | 5.5 | 8500 | |

| 规格型号 TYPE | 25℃下额定功率(W) | | 阻值范围 (Ω) | 阻值允许偏差 (%) | 温度系数 (×10 ⁻⁶ /℃) | 耐电压(V) |
|--------------|-------------|-------|-----------|------------|--------------------------------|--------|
| | 带散热板 | 不带散热板 | | | | |
| RHA | 5 | 3 | 0.1Ω-1K | ±1,±2,±5 | ±20 ±50 ±100 | 1000 |
| | 10 | 8 | 0.1Ω-1.5K | | | |
| | 20 | 12.5 | 0.1Ω-10K | | | |
| | 25 | 12.5 | 0.1Ω-10K | | | |
| | 30 | 15 | 0.1Ω-27K | | | |
| | 50 | 20 | 0.1Ω-33K | | | |
| RHA | 75 | 45 | 0.1Ω-39K | | | |
| | 100 | 50 | 0.1Ω-51K | | | |
| | 150 | 55 | 0.1Ω-56K | | | |
| | 200 | 50 | 0.1Ω-62K | | | |
| | 250 | 60 | 0.1Ω-63K | | | |
| | 300 | 75 | 0.1Ω-75K | | | |
| | 500 | 200 | 0.1Ω-82K | | | |