


FERRITE TOROIDAL INDUCTORS SINGLE WOUND

For Radio Frequency Interference Suppression.

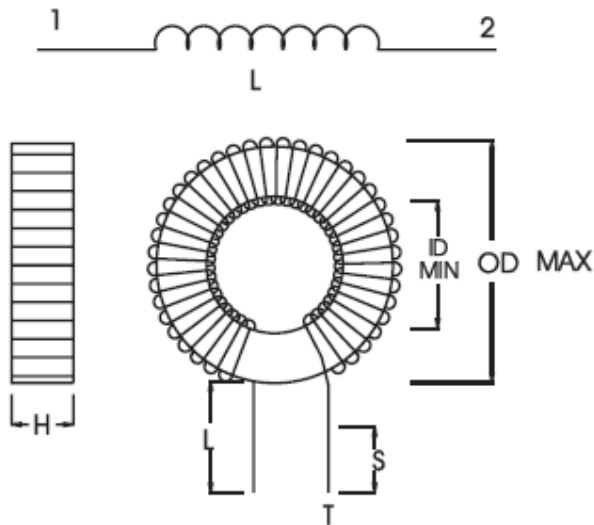

TECHNICAL DATA

Manufacturing Standard.
Manufactured to BS 613

1. INDUCTANCE TOLERANCE:
+ 30%

2. RATED CURRENT:
Referred to 50 Hz.

3. RATED INDUCTANCE:
Measured at 1Khz at 25 ° C.

Amps	Milli henries.	OD	ID	H	T	L	No turns	Temp Rise °C.	Code	Remarks
SIZE 1										
.5	30	15.5	3	8	.2	40	100	30	40/653	May be used as small 100T C.T
.6	29.3	15.5	3	8	.28	10	106	30	40/419	
1.5	1.9	15.5	3	8	.355	12	25	30	40/726	
3	2.349	15.5	5	8	.5	16	30	24	40/340	
SIZE 2										
3	9.576	24	11	8	.5	16	60	27	40/207	
5	5.62	25	10	9	.71	16	46	29	40/123	
6	3.25	25	10	9	.9	16	35	30	40/208	
6	3.5	25	10	9	.9	16	35	30	40/422	Tinned
11*	1.407	26.5	9	10	1.41	16	23	30	40/128	
11*	1.407	26.5	9	10	1.41	**	23	30	40/406	** Long Leads
SIZE 3										
3	88.5	31	8	16	.5	21	133	30	40/415	
*	These Items may be used as earth line chokes on Mains Filters up to 16 Amps.									